



Support storing energy from diesel generator

Product Introduction

Agave, a hybrid all-in-one BESS, compatible with high voltage LFP battery system, can achieve the best function to maximize clean solar power usage for your home.

Convenient

Battery pre-installed

Quiet

Less than 25 dB,
no noise pollution

Flexible

IP65
Inverter up to 6kW, battery
capacity up to 10kWh

Adaptative


Self-power, backup, and load
shifting modes

Independent

No additional modules and
inverters are required

Smart

Support VPP and IOT

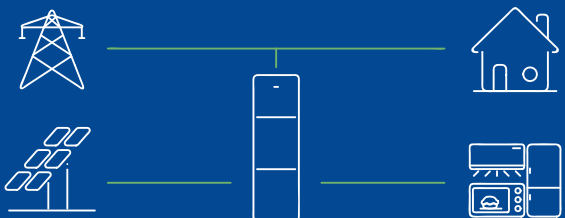

- Agave will store photovoltaic or grid energy. If there is not enough solar energy to support consumption, the battery will be discharged by Agave to meet the power demand.
- Autonomous strategy.

Agave Series

Technical parameters



Model	WH-SPHA3.6H-5.12kWh WH-SPHA3.6H-10.24kWh	WH-SPHA4.6H-5.12kWh WH-SPHA4.6H-10.24kWh	WH-SPHA5.0H-5.12kWh WH-SPHA5.0H-10.24kWh	WH-SPHA6.0H-5.12kWh WH-SPHA6.0H-10.24kWh
PV Input				
Absolute max Voltage (d.c.V)			600	
MPPT Voltage Range (d.c.V)			100..550	
Max. DC Input Power (W)	4800	6200	6650	8000
Start-up Voltage (d.c.V)			90	
Rated Operating Voltage (d.c.V)			360	
Max. Input Current (d.c.A)			12.5/12.5	
Max. inverter backfeed current to array (d.c.A)			0	
Is _c PV (d.c.A)			18/18	
NO.of MPPT Trackers			2	
NO.of Strings per MPPT Tracker			1	
Battery Model				
Battery Model	WH-BXB5.12		WH-BXB10.24	
Battery Capacity	LiFePO4 5.12kWh		LiFePO4 10.24kWh	
Nominal Battery Voltage (d.c.V)	204.8		409.6	
Battery Voltage Range (d.c.V)	160..227.2		320..454.4	
Max. Charge/Discharge Current (d.c.A)			25/25	
Cycling times			6500	
AC Input/Output				
Rated output Power (W)	3600	4600	5000	6000
Rated Apparent Power to Grid (VA)	3600	4600	5000	6000
Max. Apparent Power to Grid (VA)	3600	4600	5000	6000
Max. Apparent Power from Grid (VA)	7200	9200	10000	12000
Rated Voltage (a.c.V)	220/230/240			
Rated Frequency (Hz)	50/60			
Rated AC Current to Grid (a.c.A)	15.6	20	21.7	26.1
Max. output current (a.c.A)	17.2	22	23.9	28.7
Max. Current from Grid (a.c.A)	31.2	40	43.4	52.2
Inrush current (a.c.A)	16 a.c.A (peak), 11.3 us (duration)			
Max. output fault current (a.c.A)	57 (peak), 40 (rms)			
AC output Maximum output overcurrent protection (a.c.A)	40			
AC input power factor	-0.8..+0.8			
AC output power factor	1 (-0.8..+0.8 adjustable)			
THDi	<3%			
EPS Output (With Battery)				
Max. Output Power (W)	3600	4600	5000	6000
Rated Apparent Power (VA)	4320	5520	6000	7200
Max. Apparent Power (VA)	4320	5520	6000	7200
Rated Voltage (a.c.V)	230 (±2%)			
Normal Frequency (Hz)	50/60 (±0.2%)			
Max. Output Current (a.c.A)	18.8	24	26.1	31.3
Inrush current (a.c.A)	16 a.c.A (peak), 11.3 us (duration)			
Max. output fault current (a.c.A)	57 (peak), 40 (rms)			
EPS output Maximum output overcurrent protection (a.c.A)	40			
Switch time (ms)	<10			
THDv @Linear Load (%)	<2			
Power Factor	-0.8..+0.8			
Efficiency				
PV Max. Efficiency (%)	97.6			
PV Europe Efficiency (%)	97			
PV Max. MPPT Efficiency (%)	99.9			
Battery Charge by PV Max. Efficiency (%)	98			
Battery Discharge Efficiency (%)	96.7			
Protection				
Over/Under voltage protection	Yes			
DC isolation protection	Yes			
DC injection monitoring	Yes			
Residual current detection	Yes			
Anti-islanding protection	Yes			
Over load protection	Yes			
Battery input reverse polarity protection	Yes			
PV reverse polarity protection	Yes			
Surge protection	Yes			
Over heat protection	Yes			
General Data				
Dimension (W/D/H)(mm)	WH-BXB5.12		WH-BXB10.24	
Dimension of Packing (W/D/H)(mm)	550*233*1125		550*233*1750	
Net weight (kg)	655*302*1390		655*302*2085	
Net weight (kg)	68		115	
Gross weight (kg)	78		130	
Operation Temp (°C)	-10..+55			
Relative Humidity (%)	0..95			
Altitude (m)	≤3000			
Ingress Protection	IP65			
Cooling	Natural			
Inverter Topology	Non-isolated			
Over voltage category	III(AC), II(BC)			
Protective class	Class I			
Active anti-islanding method	frequency shift			
Human Interface	LED/APP			
BMS Communication Interface	RS485/CAN			
Meter Communication Interface	RS485			
Noise Emission (dB)	<25			
Standby Power Consumption (W)	<5			
Safety and Approvals				
Safety	IEC62040.12019 IEC 62109-1&-2 IEC62619 UN38.3 IEC60730-1			
EMC	EN IEC 61000-6-2:2019 EN IEC 61000-6-3:2021			
Certification	AS/NZS 4777.2:2020 VDE-AR-N 4105:2018-II MEA:2015 PEA:2016 EN 50549-2:2019 EN 50549-1+Poland deviation G99/I-6:2020 G98/I-6:2021 RD1699+UNE Distribution Code VDE0126+UTE C10/11: 2021			

Text and images correspond to the current state of technology at the time of printing. Subject to modifications. All information is without guarantee in spite of careful editing—liability excluded.