


# **Déjà vu**

YOUR PERFECT REPOWERING SOLUTION



YEARS FLOW, LOYALTY PERSISTS

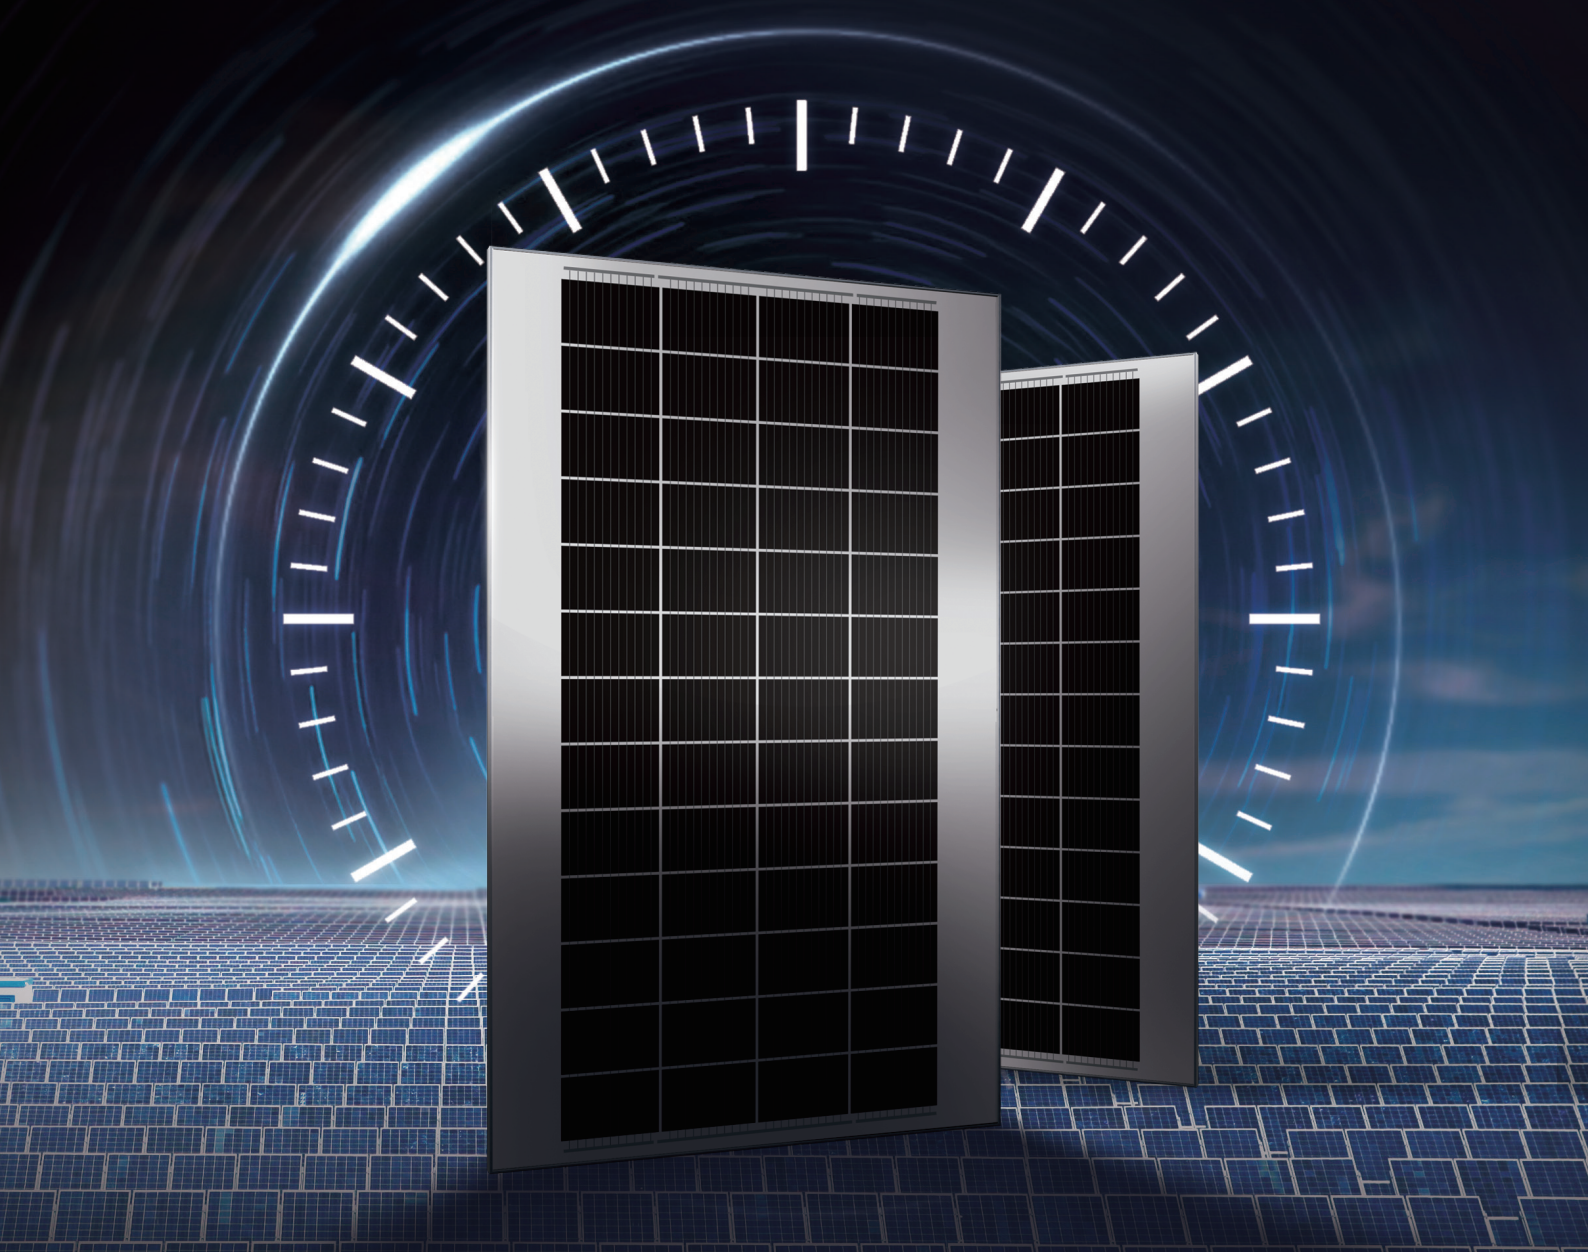

LID  
RESISTANT



PID  
RESISTANT



SALT CORROSION  
RESISTANT






SAND  
RESISTANT



AMMONIA  
RESISTANT



HIGHLY STABLE  
AND TOUGH

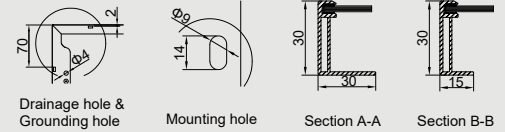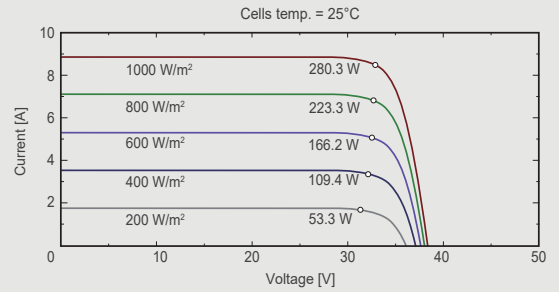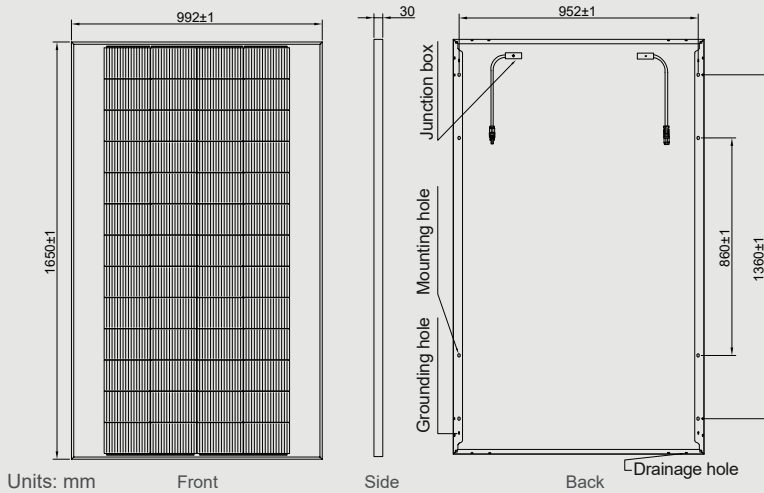

### Electrical specifications (STC\*):

Parameter	Symbol	270	275	280
Nominal max. power	$P_{max}$ (Wp)	270	275	280
Maximum operating voltage	$V_{MPP}$ (V)	32.45	32.86	33.23
Maximum operating current	$I_{MPP}$ (A)	8.32	8.37	8.43
Open-circuit voltage	$V_{oc}$ (V)	37.49	37.96	38.32
Short-circuit current	$I_{sc}$ (A)	8.75	8.81	8.89
Module efficiency	$\eta$ (%)	16.50	16.80	17.11
Power tolerance	(W)		0~+5	
Maximum system voltage	(V)		1500	
Maximum series fuse rating	(A)		15	

\*STC: Standard Test Conditions (irradiance 1000 W/m², cell temperature 25°C and air mass of AM1.5), measurement tolerance  $P_{max}$ : ±3%

### Mechanical and design specification


Cell type	n-Type TOPCon technology
No. of cells	52
Front cover	3.2 mm glass, high transmission, AR coated, tempered
Encapsulation	EVA
Back cover	White backsheet
Junction box	IP67 rated, 2 bypass diodes
Frame	30 mm anodized aluminium alloy
Cable (Including Connector)	1 x 4 mm², 900 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	1650 mm x 992 mm x 30 mm
Weight	18 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Wind load	2400 Pa or 244 kg/m²
Snow load	5400 Pa or 550 kg/m²

### Electrical specifications (NMOT\*):

Parameter	Symbol	206	210	214
Nominal max. power	$P_{max}$ (Wp)	206	210	214
Maximum operating voltage	$V_{MPP}$ (V)	30.95	31.36	31.73
Maximum operating current	$I_{MPP}$ (A)	6.66	6.70	6.74
Open-circuit voltage	$V_{oc}$ (V)	39.24	39.73	40.12
Short-circuit current	$I_{sc}$ (A)	7.00	7.05	7.11

\*NMOT: Normal Module Operating Temperature (irradiance 800 W/m², ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)


### Packaging information

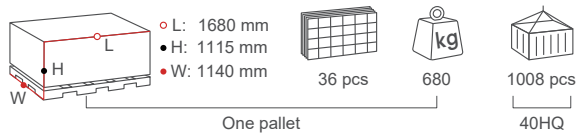

### Temperature ratings

Operating temperature	-40 to +85°C
Temp. coefficient of $P_{max}$	-0.29 %/°C
Temp. coefficient of $V_{oc}$	-0.25 %/°C
Temp. coefficient of $I_{sc}$	0.046 %/°C
Nom. operating cell temp. NOCT	42 ± 2°C

### SYSTEM AND PRODUCT CERTIFICATIONS



IEC 61215 IEC 61730  
Regular Production Surveillance  
www.tuv.com

IEC 62716 (Ammonia corrosion)  
IEC 61701 (Salt mist corrosion)  
IEC 60068 (Sand and dust)  
IEC 62804 (PID resistance)

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.



**AESOLAR**

Since 2003

+49 8231 978268 0  
sales@ae-solar.com  
www.ae-solar.com

**AESOLAR**  
Senefelderstraße 23  
86368 Gersthofen, Germany