

**MIRAGE**  
Colorful Single-glass Module



**AE\_CMD-108**

**19.49%**  
Maximum Efficiency


**108**  
Half Cells

**25 YEARS**  
Linear Power Warranty

**12 YEARS**  
Product Warranty


**Guaranteed Power Performance**

Additional value from INVITAIC Solar's linear warranty

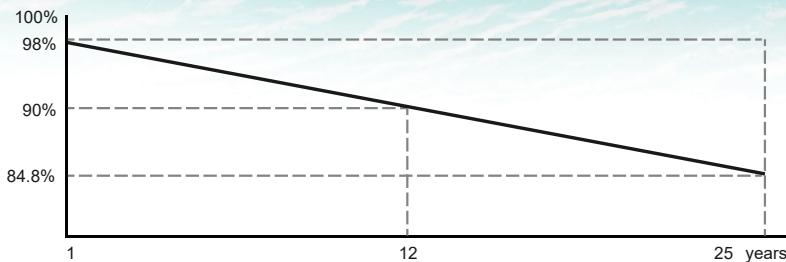

**System And Product Certifications**



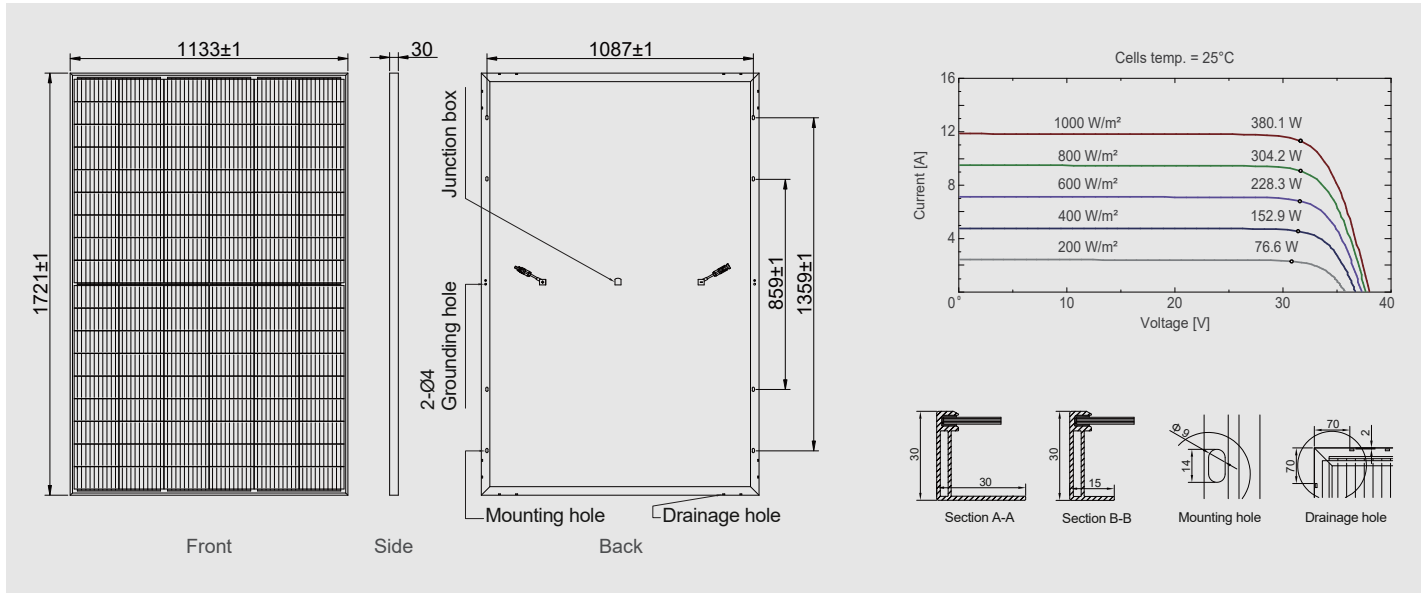

## Electrical specifications

Modules		Terracotta	Emerald	Blues	Frost	Sahara
Nominal max. power	$P_{max}$ (Wp)	355	370	375	380	380
Maximum operating voltage	$V_{MPP}$ (V)	33.20	33.28	33.45	33.27	33.32
Maximum operating current	$I_{MPP}$ (A)	10.69	11.12	11.21	11.42	11.40
Open-circuit voltage	$V_{oc}$ (V)	38.26	38.02	38.05	38.07	38.13
Short-circuit current	$I_{sc}$ (A)	11.30	11.80	11.90	12.00	12.00
Module efficiency	$\eta$ (%)	18.21	18.98	19.23	19.49	19.49
Power tolerance	(W)	0~+5				
Maximum system voltage DC	(V)	1500				
Maximum series fuse rating	(A)	25				

## Electrical specifications (NMOT\*):

Modules		Terracotta	Emerald	Blues	Frost	Sahara
Nominal max. power	$P_{max}$ (Wp)	266	277	281	285	285
Maximum operating voltage	$V_{mp}$ (V)	30.74	30.81	30.97	30.80	30.85
Maximum operating current	$I_{mp}$ (A)	8.65	8.99	9.07	9.24	9.22
Open-circuit voltage	$V_{oc}$ (V)	36.34	36.12	36.14	36.17	36.22
Short-circuit current	$I_{sc}$ (A)	9.14	9.54	9.62	9.71	9.71

\*NMOT: Normal Module Operating Temperature (Irradiance 800 W/m², Ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

## Mechanical and design specification

Cell type	N-mono 182*91mm
Dimension	1721 mm x 1133 mm x 30 mm
Weight	24 kg
Junction box	IP68 rated, 3 bypass diodes
Output cable	900 mm
Connector type	Stäubli MC4
Hail resistance	Distance 1m, Max. Ø 25 mm at 23 m/s
Wind load	2400 Pa or 244 kg/m²
Snow load	5400 Pa or 550 kg/m²

## Temperature ratings

Operating temperature	-40 to +85°C
Temp. coefficient of $P_{max}$	-0.32 %/°C
Temp. coefficient of $V_{oc}$	-0.25 %/°C
Temp. coefficient of $I_{sc}$	0.055 %/°C
Nom. operating cell temp. NOCT	45 ± 2°C

## Packaging information

Packaging configuration	36 pcs / pallet
Loading capacity	936 pcs / 40 HQ
Size / Pallet	2260 mm x 1140 mm x 1210 mm
Weight	1156 kg / pallet

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.