

N-TYPE BIFACIAL GLASS-GLASS SERIES

440/445 watt

WST-NGXB-D3 Full Black



Better low-light performance

Enhanced electricity production in low-irradiance environments



PID & LID Resistant

To reduce power degradation and ensure long-term sustained performance



Excellent durability in extreme environments

WINAICO modules are tested above and beyond international standards.

30 years product warranty

30 years linear performance

-1% 1st-year degradation

-0.40% annual power degradation

>87.4% of linear performance after 30 years



PERFORMANCE
WARRANTY



COMPLIMENTARY
INSURANCE



Power to Perform

www.winaico.com.au



MECHANICAL DATA

Cell	Monocrystalline, N-type, bifacial
Quantity and wiring of cells	108 (6 strings x 18 cells)
Bifaciality	Up to 80 %
Dimensions	1,722 x 1,134 x 35 mm
Weight	24 kg (52.9 lbs)
Front-side glass	2.0 mm, semi-tempered solar glass with anti-reflective coating
Back-side glass	2.0 mm, semi-tempered solar glass, partially black printed
Frame	Black anodised aluminium
Junction box	IP68, 3 bypass diodes
Connector type	Stäubli PV-KST4-EVO2A/xy (M), PV-KBT4-EVO2A/xy (F) IP68
Cable length (IEC/UL)	Cable 2 x 1,200 mm / 4 mm ²
Fire safety class ¹ (IEC61730)	C
Protection class (IEC 61140)	II

OPERATING CONDITION

Operating temperature	-40°C to +85°C / -40°F to +185°F
Maximum system voltage IEC/UL	1,500 V / 1,500 V
Maximum series fuse	30 A
Maximum design load (push/pull)	3,600 Pa / 1,600 Pa
Maximum test load (push/pull)	5,400 Pa / 2,400 Pa
Nominal module operating temperature NMOT	42 ± 2°C
Temperature coefficient of P _{MAX}	-0.30%/°C
Temperature coefficient of V _{OC}	-0.25%/°C
Temperature coefficient of I _{SC}	0.045%/°C

ELECTRICAL DATA

Module type	WST-440NGXB-D3 Full Black			WST-445NGXB-D3 Full Black			Wp
	STC ²	NMOT ³	BNPI ⁴	STC ²	NMOT ³	BNPI ⁴	
Nominal performance	440	334	480	445	338	485	
Voltage at maximum performance	33.26	31.32	33.26	33.51	31.56	33.51	V
Current at maximum performance	13.23	10.6	14.49	13.28	10.71	14.70	A
Open circuit voltage	38.88	37.23	38.88	39.12	37.46	39.12	V
Short circuit current	13.98	11.27	15.30	14.03	11.31	15.52	A
BSI: 1000 W/m ² front / 300 W/m ² back irradiance		17.34			17.33		A
Module efficiency		22.5			22.8		%
Bifacial gain ⁴ *Depending on irradiation conditions	10 % P _{mpp}	484 (+44)		490 (+45)			W
	15 % P _{mpp}	506 (+66)		512 (+67)			W
	20 % P _{mpp}	528 (+88)		534 (+89)			W
Power tolerance		0~+5			0~+5		W

PRODUCT AND QUALITY CERTIFICATES





IEC 61215:2021, IEC 61730:2023

ISO 9001 Quality Management System
ISO 50001 Occupational Health and Safety Management System
ISO 14001 Environment Management System



- The fire safety test methods according to IEC 61730-2, Fire Tests of Roof Coverings.
- Electrical data applies under standard test conditions (STC): solar radiation 1,000W/m² with light spectrum AM 1.5, with cell temperature 25°C. Measurement tolerance of P_{max}: ±3%; V_{oc}: ±3%; I_{sc}: ±5% at STC.
- Electrical data applies under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.


DIMENSIONS

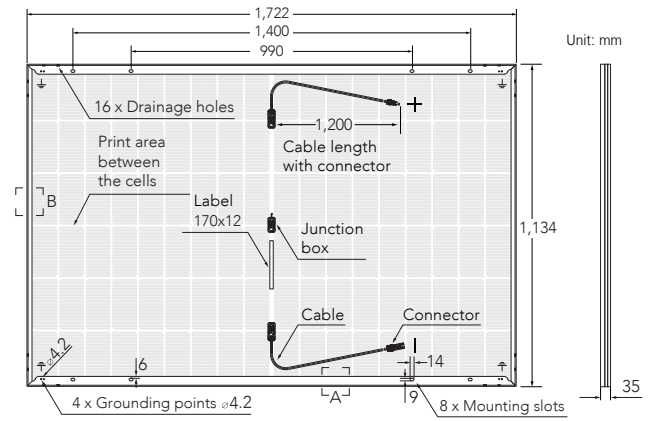

PACKAGING



WINAICO PERFORMANCE GUARANTEE

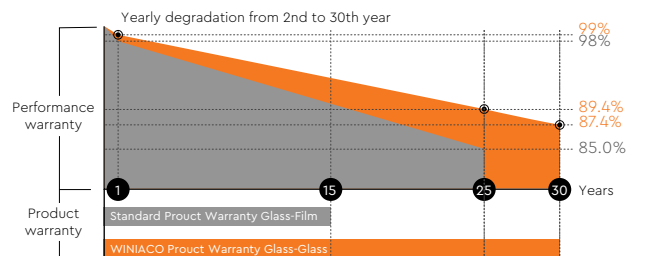

30 year product guarantee.
Linear performance guarantee for 30 years.
No more than 0.4% degradation per year from 2nd year to 30th year.

- BNPI: The front side, 1,000 W/m² solar irradiance and rear 135 W/m².
- The additional power gain from the rear side depends on the irradiance conditions at the installation site and the mounting situation.



WINAICO Australia Pty Ltd

Tel + 61 2 8091 2771
australia@winaico.com
www.winaico.com.au
3/393 George Street, Sydney NSW 2000, Australia

Win Win Precision Technology Co., Ltd

Tel + 886 3 568 8699 · info@w-win.com.tw
www.wwpt.com.tw | www.winaico.com
4F, No. 180, Sec. 2, Gongdao 5th Rd., East Dist.,
Hsinchu City 300, Taiwan R.O.C.
Made in China



WINAICO is a trademark of
Win Win Precision Technology Co., Ltd.