

TIGER Neo

48HL4M-DV

440-480 Watt


MONO-FACIAL MODULE
WITH DUAL GLASS

N-type



HOT 3.0 Technology

N-type modules with JinkoSolar's HOT 3.0 technology offer better reliability and efficiency.

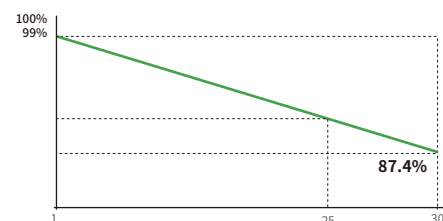

25 Year
Product Warranty

30 Year
Linear Power
Warranty

1%
First-year
Degradation

0.40%
Annual Degradation
Over 30 Years



Mechanical Load Enhanced

Certified to withstand:

5400 Pa front side max static test load

2400 Pa rear side max static test load

- IEC61215:2021 / IEC61730:2023
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



POSITIVE QUALITY™
Continuous Quality Assurance

JKM440-480N-48HL4M-DV-Z2C1-OC

JKMxxxN-48HL4M-DV (xxx=440-480, in step of 5)

Mechanical Characteristics

Cell Type	N- type Mono-crystalline
No. of cells	96 (48×2)
Dimensions	1762×1134×30 mm
Weight	21.5 kg
Front Glass	1.6 mm, Anti-reflection Coating
Back Glass	1.6 mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class C
Connector Type	PV-JK03M/xy,PV-JK03M2/xy (Jinko) ; PV-KST4-EVO2A/xy,PV-KBT4-EVO2A/xy (Staubli)
Output Cables (Including Connector)	4.0 mm ² (+): 400 mm , (-): 200 mm or Customized Length

* MC4 and MC4-EVO2 available upon request and subject to availability

Packaging Configuration

Pallet Dimensions	1792×1140×1249 mm
Packing Detail (Two pallets = One stack)	37 pcs/pallets, 74 pcs/stack, 962 pcs/ 40'HQ Container

Specifications (STC)


Maximum Power - Pmax [Wp]	440	445	450	455	460	465	470	475	480
Maximum Power Voltage - Vmp [V]	29.57	29.81	30.04	30.28	30.51	30.74	30.97	31.19	31.42
Maximum Power Current - Imp [A]	14.88	14.93	14.98	15.03	15.08	15.13	15.18	15.23	15.28
Open-circuit Voltage - Voc [V]	35.57	35.74	35.91	36.08	36.25	36.42	36.59	36.76	36.93
Short-circuit Current - Isc [A]	15.63	15.68	15.73	15.78	15.83	15.88	15.93	15.98	16.03
Module Efficiency STC [%]	22.02	22.27	22.52	22.77	23.02	23.27	23.52	23.77	24.02
Power Measurement Tolerance	± 3%								
Power Sorting	-5W ~ +15W								
Temperature Coefficient of Pmax	-0.29 %/°C								
Temperature Coefficient of Voc	-0.25 %/°C								
Temperature Coefficient of Isc	0.045 %/°C								

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Application Conditions



Operating Temperature	-40 °C ~ +70 °C
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	30 A

Engineering Drawings

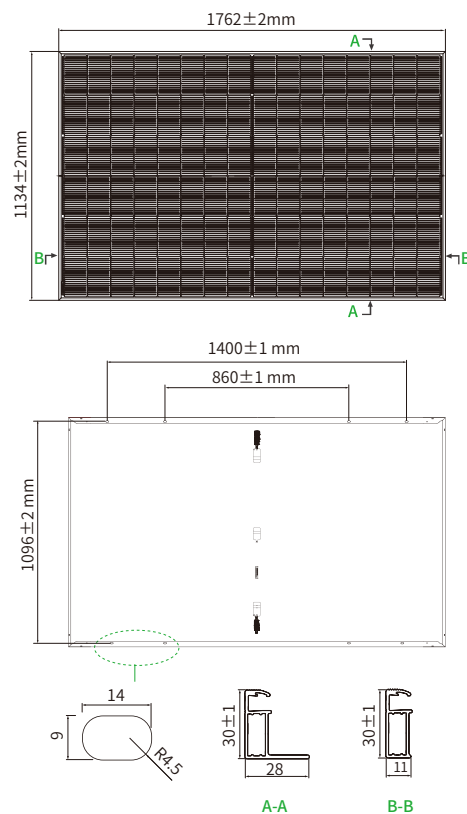

*Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

Electrical Performance

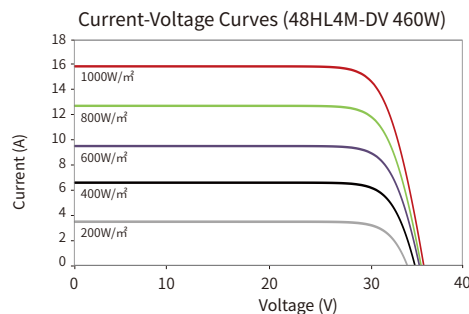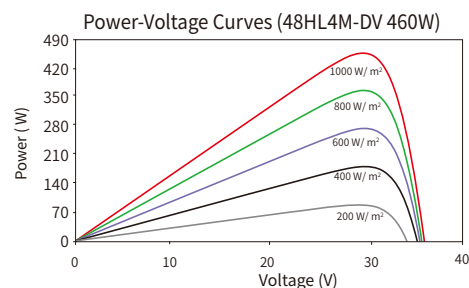

Made in China

© 2025 Jinko Solar Co., Ltd. All rights reserved.

JKM440-480N-48HL4M-DV-Z2C1-OC

Note: Please read the safety and installation manual before using the product. We reserve the right of final interpretation. The specifications in this datasheet are subject to change without notice.

www.jinkosolar.com
www.jinkosolar.com.au