

Cheetah HC 60M 325-345 Watt

MONO PERC HALF CELL MODULE

- Half Cell
- Mono PERC 60 Cell
(Made in China)



PERC



KEY FEATURES



5 Busbar Solar Cell

5 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



High Efficiency

Higher module conversion efficiency (up to 20.45%) benefit from half cell structure (low resistance characteristic).



Low-light Performance

Advanced glass and cell surface textured design ensure excellent performance in low-light environment.



Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty • 25 Year Linear Power Warranty




- ISO9001:2015, ISO14001:2015, ISO45001:2018 certified factory
- IEC61215(2016), IEC61730(2016) certified product


Nomenclature:

JKMxxxM-60/72H-V

Code	Cell	Code	Certification
null	Full	null	1000V
H	Half	V	1500V

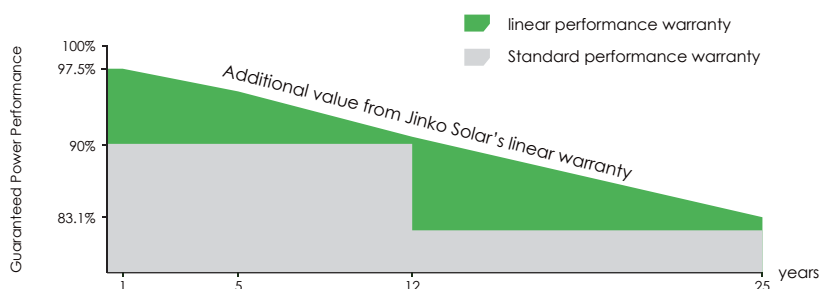

Engineering Drawings

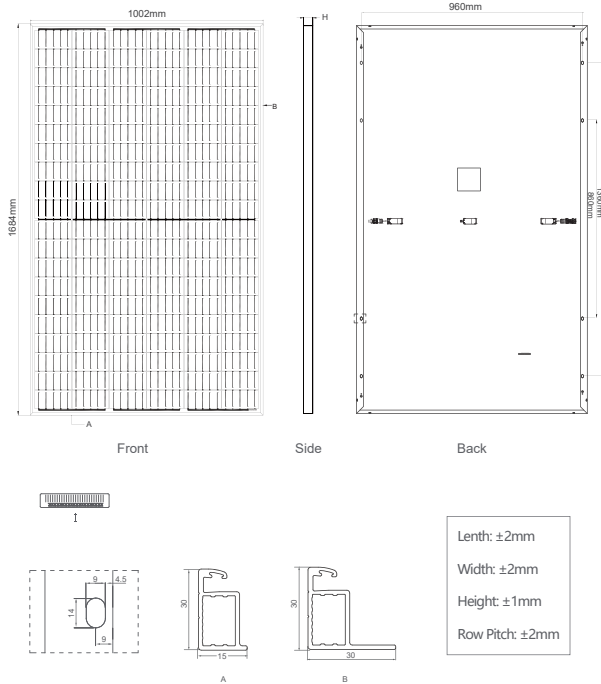


Packaging Configuration

(Two pallets = One stack)

35pcs/pallet, 70pcs/stack, 910pcs/40'HQ Container

Electrical Performance & Temperature Dependence

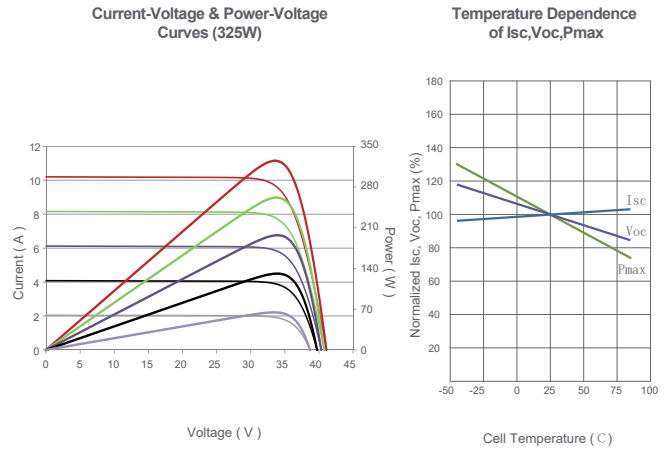

Mechanical Characteristics

Cell Type	Mono PERC 158.75×158.75mm
No. of Half-cells	120 (6×20)
Dimensions	1684×1002×30mm (66.30×39.45×1.18 inch)
Weight	18.5 kg (40.8 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TÜV 1x4.0mm ² , (+) 290mm, (-) 145mm or Customized Length
Connector Type	1000V:Staubli MC4JK03M/1B, JK03M2/1B, Jinko PV material 1500V:Staubli MC4-EVO2JK03M/2B, JK03M2/2B, Jinko PV material
Fire Class	Class C

SPECIFICATIONS

Module Type	JKM325M-60H		JKM330M-60H		JKM335M-60H		JKM340M-60H		JKM345M-60H	
	JKM325M-60H-V		JKM330M-60H-V		JKM335M-60H-V		JKM340M-60H-V		JKM345M-60H-V	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	325Wp	239Wp	330Wp	243Wp	335Wp	247Wp	340Wp	250Wp	345Wp	254Wp
Maximum Power Voltage (Vmp)	33.37V	30.6V	33.54V	30.7V	33.74V	30.9V	33.93V	31.0V	34.12V	31.2V
Maximum Power Current (Imp)	9.74A	7.82A	9.84A	7.90A	9.93A	7.98A	10.02A	8.06A	10.11A	8.13A
Open-circuit Voltage (Voc)	40.4V	38.1V	40.6V	38.2V	40.8V	38.4V	41.0V	38.60V	41.2V	38.8V
Short-circuit Current (Isc)	10.50A	8.48A	10.61A	8.57A	10.73A	8.67A	10.82A	8.74A	10.91A	8.81A
Module Efficiency STC (%)	19.26%		19.56%		19.85%		20.15%		20.45%	
Operating Temperature (°C)	-40°C~+85°C									
Maximum System Voltage	1000/1500VDC (IEC) with -V=1500V, without -V=1000V									
Maximum Series Fuse Rating	20A									
Power measurement tolerance	-3%~+3%									
Temperature Coefficients of Pmax	-0.35%/°C									
Temperature Coefficients of Voc	-0.29%/°C									
Temperature Coefficients of Isc	0.048%/°C									
Nominal Operating Cell Temperature (NOCT)	45±2°C									

STC: Irradiance 1000W/m²

Cell Temperature 25°C

AM=1.5

NOCT: Irradiance 800W/m²

Ambient Temperature 20°C

AM=1.5

Wind Speed 1m/s