

Up to 430 watt

# WST-NGX-D3

## N-Type Bifacial Glass-Glass Series

Higher yield panel design for commercial and residential owners



PERFORMANCE WARRANTY




COMPLIMENTARY INSURANCE




[www.winaico.com.au](http://www.winaico.com.au)

## DIMENSIONS

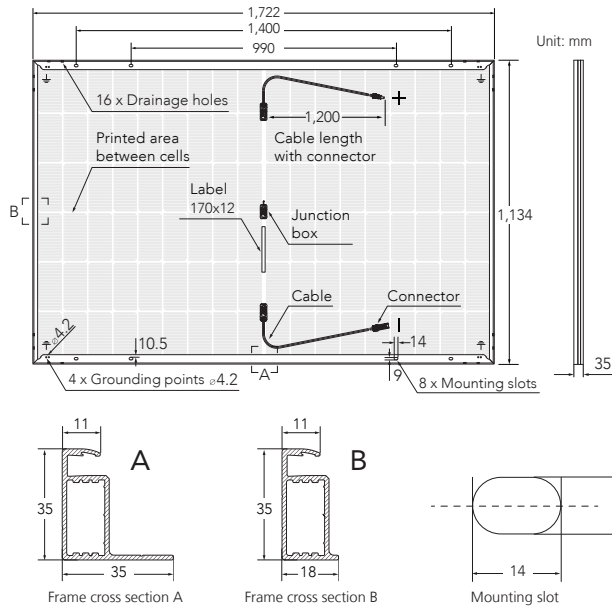


## PACKAGING



## MECHANICAL DATA WINAICO WST-NGXB-D3 SERIES

Cell	Monocrystalline, N-type, bifacial
Quantity and wiring of cells	108 (6 strings x 18 cells)
Bifaciality	Up to 80 %
Dimensions	1,722 x 1,134 x 35 mm (67.80 x 44.65 x 1.38 in)
Weight	24 kg (52.9 lbs)
Front-side glass	2.0 mm, tempered solar glass with anti-reflective coating
Back-side glass	2.0 mm, tempered solar glass, partially white printed
Encapsul material	POE
Frame	Black anodised aluminium
Junction box	IP68, 3 bypass diodes
Connector type	MC4-EVO2A IP68
Cable length (IEC/UL)	Cable 2 x 1.2 m (47.24 in) / 4 mm <sup>2</sup>
Module fire performance	4
Fire safety class	C

## WINAICO PERFORMANCE GUARANTEE

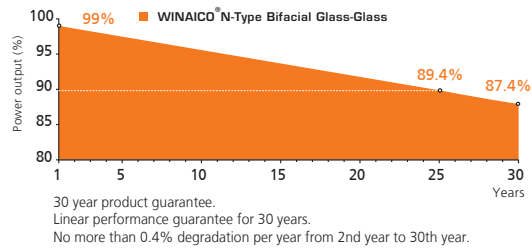

## Operating conditions

Operating temperature	
Maximum system voltage IEC/UL	
Maximum series fuse	
Maximum design load (push/pull)	
Maximum test load (push/pull)	
Nominal module operating temperature NMOT	
Temperature coefficient of $P_{MAX}$	
Temperature coefficient of $V_{OC}$	
Temperature coefficient of $I_{SC}$	
Certifications	

## WINAICO WST-NGXB-D3

Operating temperature	-40 °C to +85 °C / -40 °F to +185 °F
Maximum system voltage IEC/UL	1,500V/1,500V
Maximum series fuse	30 A
Maximum design load (push/pull)	3,600 Pa/1,600 Pa
Maximum test load (push/pull)	5,400 Pa/2,400 Pa
Nominal module operating temperature NMOT	42 ± 2 °C
Temperature coefficient of $P_{MAX}$	-0.30%/°C
Temperature coefficient of $V_{OC}$	-0.25%/°C
Temperature coefficient of $I_{SC}$	0.045%/°C
Certifications	IEC 61215-1:2016, IEC 61215-2:2016, IEC 61730-1:2016, IEC 61730-2:2016

## Electrical data (STC)<sup>1</sup>

Nominal performance	$P_{MAX}$	
Voltage at maximum performance	$V_{MP}$	
Current at maximum performance	$I_{MP}$	
Open circuit voltage	$V_{OC}$	
Short circuit current	$I_{SC}$	
Module efficiency		
Bifacial gain <sup>3</sup>	10 % Pmpp	
	15 % Pmpp	
	20 % Pmpp	
Power tolerance		

## WST-430NGX-D3

Nominal performance	$P_{MAX}$	430	Wp
Voltage at maximum performance	$V_{MP}$	32.68	V
Current at maximum performance	$I_{MP}$	13.16	A
Open circuit voltage	$V_{OC}$	38.60	V
Short circuit current	$I_{SC}$	13.80	A
Module efficiency		22.02	%
Bifacial gain <sup>3</sup>	10 % Pmpp	473 (+43)	W
	15 % Pmpp	494 (+64)	W
	20 % Pmpp	516 (+86)	W
Power tolerance		-0/+5	W

## Electrical data (NMOT)<sup>2</sup>

Nominal performance	$P_{MAX}$	
Voltage at maximum performance	$V_{MP}$	
Current at maximum performance	$I_{MP}$	
Open circuit voltage	$V_{OC}$	
Short circuit current	$I_{SC}$	

## WST-430NGX-D3

Nominal performance	$P_{MAX}$	322	Wp
Voltage at maximum performance	$V_{MP}$	30.51	V
Current at maximum performance	$I_{MP}$	10.56	A
Open circuit voltage	$V_{OC}$	36.52	V
Short circuit current	$I_{SC}$	11.12	A

- Electrical data applies under standard test conditions (STC): solar radiation 1,000 W/m<sup>2</sup> with light spectrum AM 1.5, with cell temperature 25 °C. Measurement tolerance of  $P_{MAX}$  at STC: ±3%. Accuracy of other electrical data: ±10%.
- Electrical data applies under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m<sup>2</sup>, spectrum AM 1.5, ambient temperature 20 °C, wind speed 1 m/s.
- The additional power gain from the rear side depends on the irradiance condition at the installation site and the mounting situation.



**WINAICO Australia Pty Ltd**  
Tel + 61 2 8091 2771  
australia@winaico.com  
https://www.winaico.com.au/  
3/393 George Street, Sydney NSW 2000, Australia



WINAICO is a trademark of  
Win Win Precision Technology Co., Ltd.

## Win Win Precision Technology Co., Ltd

Tel + 886 3 568 8699 · info@w-win.com.tw  
www.wwpt.com.tw · www.winaico.com  
4F., No. 180, Sec. 2, Gongdao 5th Rd., East Dist.,  
Hsinchu City 300, Taiwan R.O.C.  
Made in China