

PHONO

615-635W

Helios Module Series

N-HJT HIGH EFFICIENCY 132-0BB-W-WG

Bloomberg
NEW ENERGY FINANCE

Tier1



Excellent Power Generation Performance

- Optimized cell size brings higher power
- Up to 95% bifaciality
- Competitive high-temperature performance with ameliorated temperature coefficient (-0.24%/°C)
- Better weak illumination response of HJT technology leads higher power generation

Higher Quality Reliability


- N-type with lower LID and LeTID
- Industry-leading cell technology of TCO thin film contributes to excellent anti-PID characteristic
- Sealing with PIB based sealant to achieve stronger water resistance, greater air impermeability and longer module lifespan

Shorter Payback Time

- Lower BoS cost ensure a better LCOE

More Environmentally Friendly

- Low temperature welding technology & shorter manufacturing process contributes to lower carbon emissions

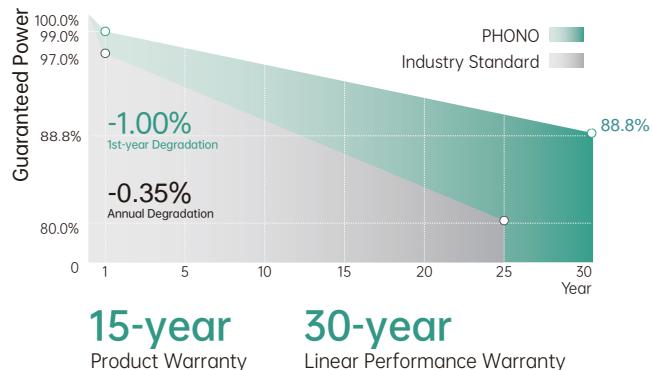

MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730

ISO 9001
2015 / Quality management system

ISO 14001
2015 / Standards for environmental management system

ISO 45001
2018 / International standards for occupational health & safety



Electrical Typical Values

Model	PS615L14GFH-22/WSHW	PS620L14GFH-22/WSHW	PS625L14GFH-22/WSHW	PS630L14GFH-22/WSHW	PS635L14GFH-22/WSHW					
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated Power (Pmpp)	615	469	620	473	625	477	630	481	635	484
Rated Current (Impp)	15.03	12.01	15.12	12.08	15.21	12.16	15.30	12.23	15.39	12.30
Rated Voltage (Vmpp)	40.96	39.09	41.05	39.18	41.14	39.26	41.23	39.34	41.32	39.42
Short Circuit Current (Isc)	15.86	12.68	15.96	12.76	16.06	12.84	16.16	12.92	16.26	13.00
Open Circuit Voltage (Voc)	49.05	46.82	49.15	46.91	49.25	47.01	49.34	47.09	49.43	47.18
Module Efficiency (%)	22.80		23.00		23.10		23.30		23.50	

STC (Standard Testing Conditions): Irradiance 1000W/m², AM 1.5, Cell Temperature 25°C

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

Made in China. Measurement Tolerance at STC: Pmax±3%, Voc±3% and Isc±5%

BNPI


Maximum Power (Pmax)	689	695	700	706	712
Optimum Operating Current (Impp)	16.78	16.88	16.98	17.08	17.18
Optimum Operating Voltage (Vmpp)	41.10	41.19	41.28	41.37	41.46
Short Circuit Current (Isc)	17.79	17.90	18.01	18.12	18.24
Open Circuit Voltage (Voc)	49.22	49.32	49.42	49.51	49.60

BNPI: Front Side Irradiation 1000W/m², Back Side Reflection Irradiation 135W/m², AM 1.5, Ambient Temperature 25°C

Mechanical Characteristics

Cell Type	HJT Monocrystalline
Dimension (L × W × H)	Length: 2382mm (93.78 inch) Width: 1134mm (44.65 inch) Height: 30mm (1.18 inch)
Weight	32.6kg (71.87 lbs)
Glass	2.0mm/2.0mm toughened glass
Frame	Anodized Aluminum Alloy
Cable (Including Connector)	4mm ² (IEC), (+): 350mm, (-): 250mm or Customized Length
Junction Box/Connector	IP 68 Rated, EVO2

Electrical Characteristics

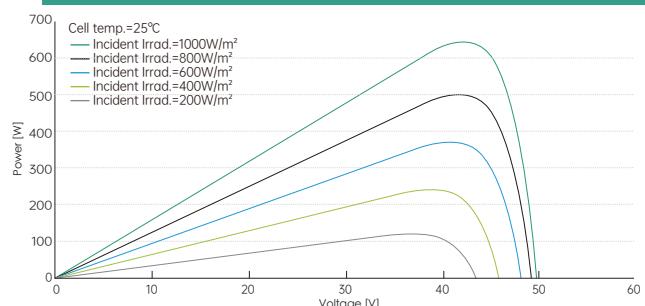

Temperature Ratings

Voltage Temperature Coefficient	-0.22%/°C
Current Temperature Coefficient	+0.04%/°C
Power Temperature Coefficient	-0.24%/°C
Power Tolerance	0~+5w
NOCT	44±2°C
Bifaciality Coefficient	Pmax : 90±5%, Voc:95~100%, Isc: 90±5%

Absolute Maximum Rating

Operating Temperature	From -40 to + 85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	30A
PV Module Classification	Class II
Fire Rating (IEC 61730)	C
Maximum System Voltage	DC 1500V

Packing Configuration

Container	40' HQ
Pieces/Container	720
Pcs/Pallet	36
Pallets/Container	20

