



## **High Impact Resistance**

- · 2+2mm Reinforced double-glazed glass
- · Wind-resistant design
- Maximum static load on the front ≥ 5400Pa



## Integrated Diverse Applications

- Carport
- · Sun Shed



## Fast Installation

- · Modular design, easy replacement
- · Two installation methods, accommodate sophisticated situation



## Structured integrated drainage

- · No need extra water guide
- · Excellent waterproof sealing performance












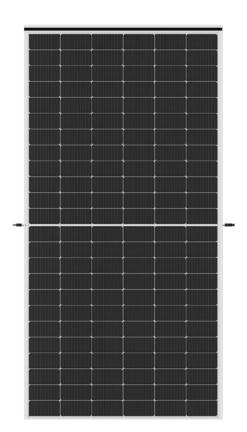

BMT-P2	2/144A
--------	--------

Structural Data	BMT-P2/144A
Size	2327x1160x30mm
Weight	32kg
Cell Type	182 Mono PERC
Electrical Data (STC) STC:AM=1.5, irradiance 1000W/ m², Component Temperature 25° C	
Max Power (Pmax)	550W
Voltage at Max Power (Vmpp)	41.35V
Current at Max Power (Impp)	13.30A
Voltage at Open Circuit (Voc)	49.84V
Current at Short Circuit (Isc)	14.18A
Module Efficiency	20.4
Temperature Coefficient	
Isc	0.048%/°C
Voc	-0.28%/°C
PMPP	-0.35%/℃
Mechanical Load	
Max Front Side Static Load	5400Pa
Max Rear Side Static Load	2400Pa
Carbon Neutral Index (30 years)	
Energy Output	16326kWh
Equivalent to Standard Coal	4980kg
Carbon Emission Reduction	9486kg



**PV Charging Carport With Storage** 



Various sheds