


# HT60-18X(ND)-F

Double Glass TOPCon PV Module

**HIGH** High power

**HT60-18X(ND)-F**  
**460W/465W/470W**  
**475W/480W**

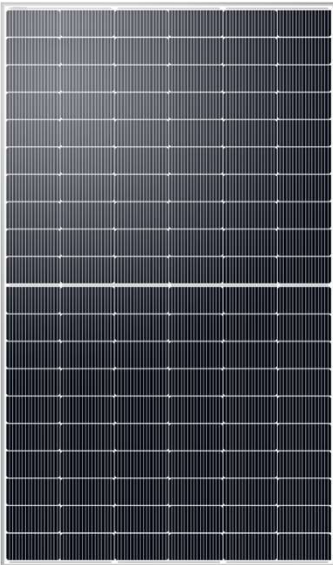

- Module Efficiency Up To 22.2%
- No. of Cells: 120 (6×20)
- Weight: 26.5(±0.5)kg
- Dimensions: 1909×1134×30mm
- Cell Dimensions: 182×91mm
- Bifaciality: 80(±5)%
- For Australian market



MULTIWAY+

Shanghai Aerospace Automobile Electromechanical Co., Ltd.  
 Website: www.ht-saae.com.au  
 Address: 222 Caoxi Rd, the 8th Floor of Spaceflight

Made in China



Half-cut cell technology reducing internal power loss and improving module overall power; offer excellent heat dissipation helping to avoid hot spot production.

**30Yrs**

Product warranty for All Rooftop Installations; 12Yrs for Ground Mounted

**30Yrs**

Warranty on power output

**EL Tested**

Microcrack resistant for enhance reliability, double EL tested of high level of quality control.




Entire module certified to with stand extreme wind (2400 Pa) and snow loads (5400 Pa)

**TOPCon**

Double-glass; the optimised number and width of main gate lines, maximising light receiving area and reducing module power consumption.



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximising system output.


**Anti-PID**

PID resistant (optional)

**Low Degradation Rate\*\***

**Comprehensive and first-rate certification system**

IEC 61215:2016. IEC 61730:2016 Latest Standard ISO 9001, ISO 14001 and ISO 45001, meeting the highest international standards Strict quality control



\* Copyright@2023V1 Specifications are subject to change without further notification

## HT60-18X(ND)-F-460W/465W/470W/475W/480W

### Electrical Characteristics (STC)

Module Type	HT60-18X(ND)-F				
Maximum Power(Pmax)	460W	465W	470W	475W	480W
Open Circuit Voltage(Voc)	42.2V	42.3V	42.4V	42.5V	42.6V
Short Circuit Current(Isc)	13.99A	14.07A	14.15A	14.23A	14.31A
Maximum Power Voltage(Vmp)	34.8V	35.0V	35.2V	35.4V	35.6V
Maximum Power Current(Imp)	13.24A	13.30A	13.37A	13.43A	13.50A
Module Efficiency	21.2%	21.5%	21.7%	21.9%	22.2%
Power Tolerance	±3%W				
Maximum System Voltage	1500V DC(IEC)				
Maximum Series Fuse Rating	25A				
Operating Temperature	-40°C to +85°C				


\* STC: AM 1.5, Irradiance 1000W/m<sup>2</sup>, module temperature 25°C

### Electrical Characteristics (NMOT)


Module Type	HT60-18X(ND)-F				
Maximum Power(Pmax)	350W	354W	357W	361W	365W
Open Circuit Voltage(Voc)	40.5V	40.6V	40.7V	40.8V	40.9V
Short Circuit Current(Isc)	11.27A	11.34A	11.40A	11.47A	11.53A
Maximum Power Voltage(Vmp)	33.4V	33.6V	33.8V	34.0V	34.2V
Maximum Power Current(Imp)	10.48A	10.54A	10.56A	10.62A	10.67A

\* NMOT: Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1m/s


Nominal Module Operating Temperature(NMOT)	43±2°C
Temperature Coefficient of Pmax	γ (Pm) -0.31%/°C
Temperature Coefficient of Voc	β (Voc) -0.25%/°C
Temperature Coefficient of Isc	α (Isc) 0.046%/°C
Solar Cells	Monocrystalline 182× 91mm
No. of Cells	120 (6×20)
Dimensions	1909mm×1134mm×30mm
Weight	26.5 (±0.5) kg
Glass (Front/Back)	High transmission coated tempered glass/Heat strength glass
Frame	Anodised aluminum alloy
Junction Box/Connectors	IP68/PV-HT005-01(HT-SAAE products)
Cable	4mm <sup>2</sup> (IEC) Length: (+) 1200mm, (-) 1200mm
Fire Rating	Class C
Packaging Configuration	36 pcs/box: 864 pcs/ 40' HQ Container

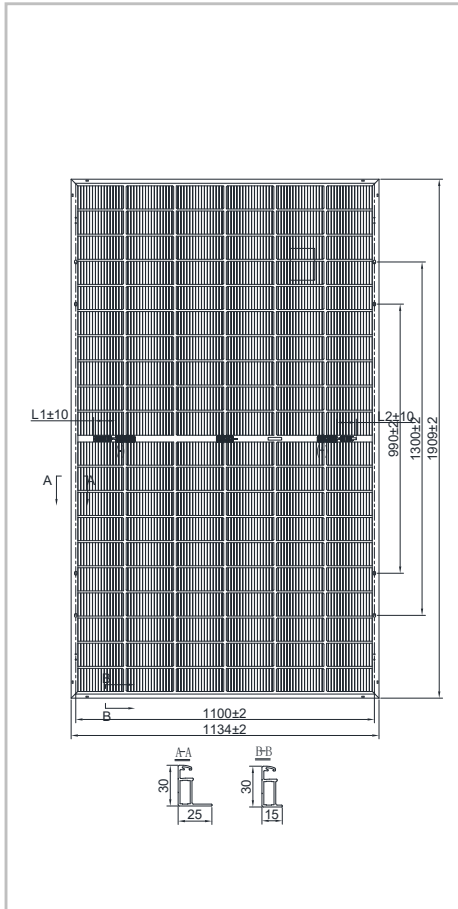

### IV Curves

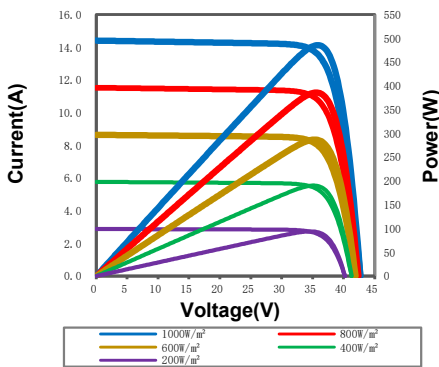

### Warranty

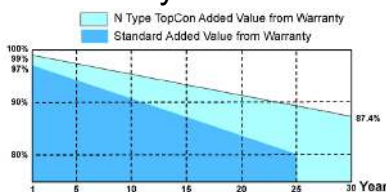

12/30-year product warranty\*

\*\*Less than 0.4% annual degradation rate over 30-year power output warranty\*

\* Specific information is referred to the product quality guarantee

\*The module recycling should be carried out by the professional institutions at the end of module life cycle

\*Copyright©2023V1 Specifications are subject to change without further notification \*Only available in Australia