

# Tiger Pro 72HC

## 530-545 Watt

### MONO-FACIAL MODULE


#### P-Type

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018  
Occupational health and safety management systems  
(Made in China)

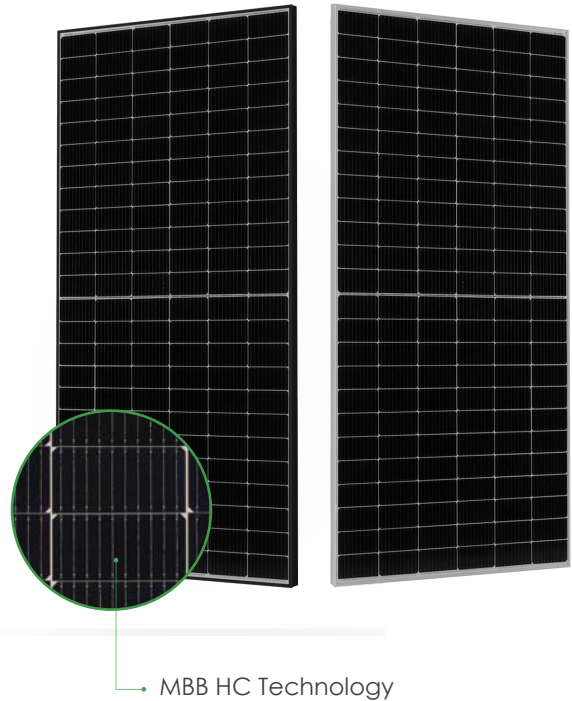

MBB HC Technology

## Key Features



#### Multi Busbar Technology

Better light trapping and current collection to improve module power output and reliability.



#### Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



#### Reduced Hot Spot Loss

Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient.



#### Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




#### Longer Life-time Power Yield

0.55% annual power degradation and 25 year linear power warranty.



POSITIVE QUALITY™  
Continuous Quality Assurance

## LINEAR PERFORMANCE WARRANTY

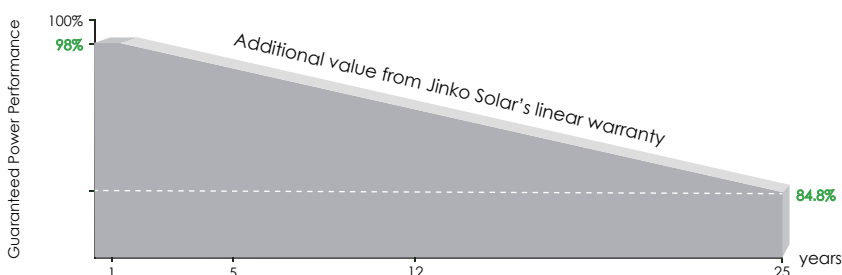


**12 Year Product Warranty**

**25 Year Linear Power Warranty**

**0.55% Annual Degradation Over 25 years**

## Engineering Drawings

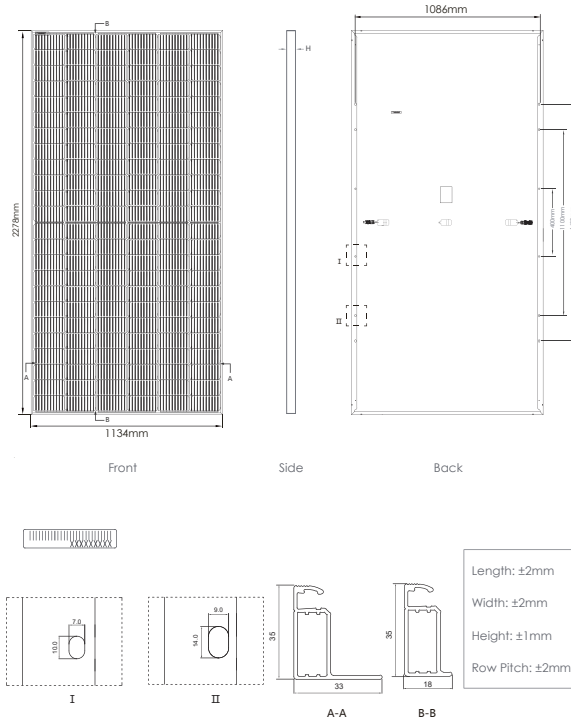


## Packaging Configuration

( Two pallets = One stack )

31pcs/pallets, 62pcs/stack, 620pcs/ 40'HQ Container

## Electrical Performance & Temperature Dependence

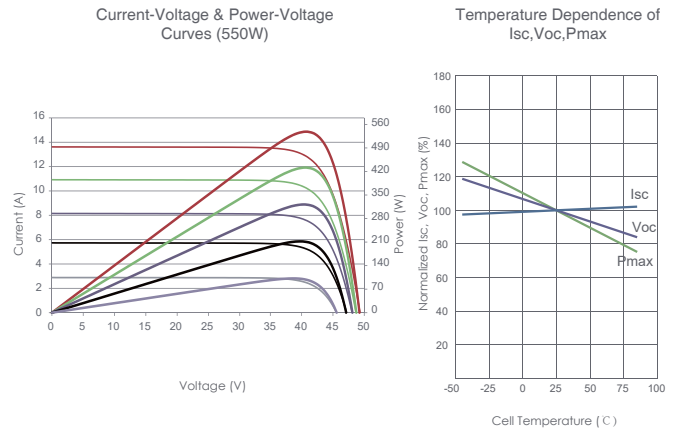

## Mechanical Characteristics

Cell Type	P type Mono-crystalline
No. of cells	144 (6×24)
Dimensions	2278×1134×35mm (89.69×44.65×1.38 inch)
Weight	27 kg (59.52 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Output Cables	TUV 1×4.0mm <sup>2</sup> (+): 400mm, (-): 200mm or Customized Length
Connector Type	1000V: Staubli MC4/JK03M/2B, JK03M2/2B, Jinko PV material 1500V: Staubli MC4-EVO2/JK03M/2B, JK03M2/2B, Jinko PV material
Fire Class	Class C

## SPECIFICATIONS

Module Type	JKM530M-72HL4 JKM530M-72HL4-V		JKM535M-72HL4 JKM535M-72HL4-V		JKM540M-72HL4 JKM540M-72HL4-V		JKM545M-72HL4 JKM545M-72HL4-V	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	530Wp	394Wp	535Wp	398Wp	540Wp	402Wp	545Wp	405Wp
Maximum Power Voltage (Vmp)	40.56V	37.84V	40.63V	37.91V	40.70V	38.08V	40.80V	38.25V
Maximum Power Current (Imp)	13.07A	10.42A	13.17A	10.50A	13.27A	10.55A	13.36A	10.60A
Open-circuit Voltage (Voc)	49.26V	46.50V	49.34V	46.57V	49.42V	46.65V	49.52V	46.74V
Short-circuit Current (Isc)	13.71A	11.07A	13.79A	11.14A	13.85A	11.19A	13.94A	11.26A
Module Efficiency STC (%)	20.55%		20.75%		20.94%		21.13%	
Operating Temperature(°C)	-40°C~-+85°C							
Maximum system voltage	1000/1500VDC (IEC)    with -V=1500V, without -V=1000V							
Maximum series fuse rating	25A							
Power measurement tolerance	-3%~+3%							
Power sorting tolerance	-5W~+15W							
Temperature coefficients of Pmax	-0.35%/°C							
Temperature coefficients of Voc	-0.28%/°C							
Temperature coefficients of Isc	0.048%/°C							
Nominal operating cell temperature (NOCT)	45±2°C							

\*STC: Irradiance 1000W/m<sup>2</sup> Cell Temperature 25°C

NOCT: Irradiance 800W/m<sup>2</sup> Ambient Temperature 20°C

AM=1.5

AM=1.5

Wind Speed 1m/s