

Tiger Neo N-type

72HL4R-BDV

575-595 Watt

BIFACIAL MODULE WITH DUAL GLASS

N-Type


IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018

Occupational health and safety management systems
(Made in China)

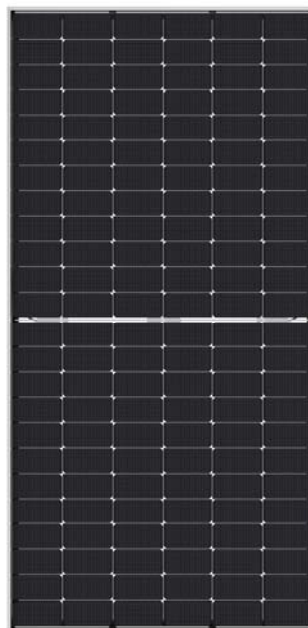


Key Features



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




Higher Power Output

Module power increases 5-25% generally, bringing significantly lower LCOE and higher IRR.



POSITIVE QUALITY™
Continuous Quality Assurance

LINEAR PERFORMANCE WARRANTY

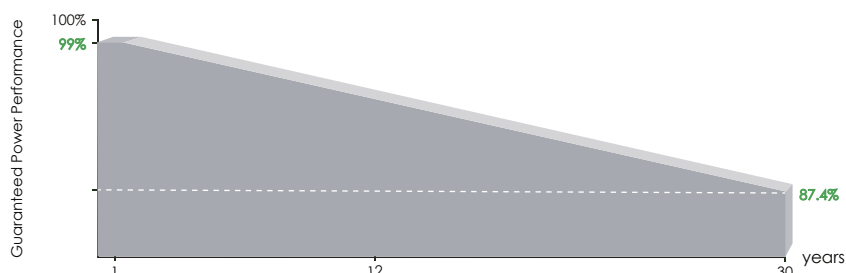


12 Year Product Warranty

30 Year Linear Power Warranty

0.40% Annual Degradation Over 30 years

Engineering Drawings

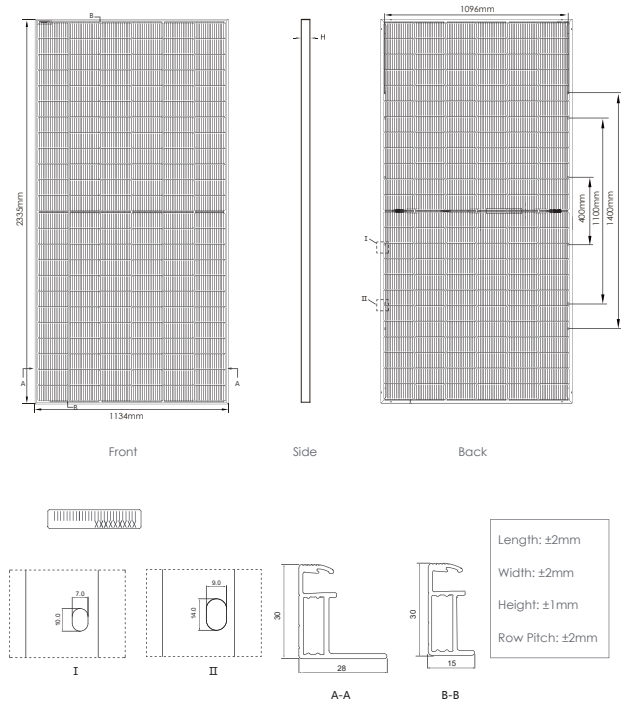


*This tolerance range applies only to the four-angle distance of the module as indicated above.

Packaging Configuration

(Two pallets = One stack)

36pcs/pallets, 72pcs/stack, 720pcs/ 40'HQ Container

Electrical Performance & Temperature Dependence

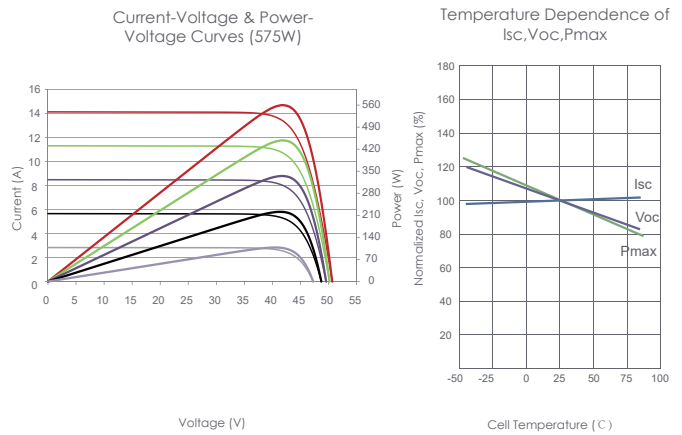

Mechanical Characteristics

Cell Type	N type Mono-crystalline
No. of cells	144 (2×72)
Dimensions	2335×1134×30mm (91.93×44.65×1.18 inch)
Weight	33 kg (72.75 lbs)
Front Glass	2.0mm, Anti-Reflection Coating
Back Glass	2.0mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Output Cables	TUV 1×4.0mm ² (+): 400mm, (-): 200mm or Customized Length
Connector 1000V:	Staubli MC4, JK03M/1B, JK03M2/1B, Jinko PV material
Type 1500V:	Staubli MC4-EVO2, JK03M/2B, JK03M2/2B, Jinko PV material
Fire Class	Class C

SPECIFICATIONS

Module Type	JKM575N-72HL4R-BDV		JKM580N-72HL4R-BDV		JKM585N-72HL4R-BDV		JKM590N-72HL4R-BDV		JKM595N-72HL4R-BDV	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	575Wp	432Wp	580Wp	436Wp	585Wp	440Wp	590Wp	444Wp	595Wp	447Wp
Maximum Power Voltage (Vmp)	42.44V	39.78V	42.59V	39.87V	42.74V	40.03V	42.88V	40.18V	43.03V	40.27V
Maximum Power Current (Imp)	13.55A	10.87A	13.62A	10.94A	13.69A	10.99A	13.76A	11.05A	13.83A	11.11A
Open-circuit Voltage (Voc)	51.27V	48.70V	51.47V	48.89V	51.67V	49.08V	51.86V	49.26V	52.06V	49.45V
Short-circuit Current (Isc)	14.31A	11.55A	14.37A	11.60A	14.43A	11.65A	14.49A	11.70A	14.55A	11.75A
Module Efficiency STC (%)	21.72%		21.90%		22.09%		22.28%		22.47%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1500VDC (IEC) with -V=1500V, without -V=1000V									
Maximum series fuse rating	30A									
Power measurement tolerance	±3%									
Temperature coefficients of Pmax	-0.29%/°C									
Temperature coefficients of Voc	-0.25%/°C									
Temperature coefficients of Isc	0.045%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									
Refer. Bifacial Factor	80±5%									

BIFACIAL OUTPUT-REAR SIDE POWER GAIN

		604Wp	609Wp	614Wp	620Wp	625Wp
5%	Maximum Power (Pmax)	604Wp	609Wp	614Wp	620Wp	625Wp
	Module Efficiency STC (%)	22.80%	23.00%	23.20%	23.40%	23.59%
15%	Maximum Power (Pmax)	661Wp	667Wp	673Wp	679Wp	684Wp
	Module Efficiency STC (%)	24.97%	25.19%	25.41%	25.62%	25.84%
25%	Maximum Power (Pmax)	719Wp	725Wp	731Wp	738Wp	744Wp
	Module Efficiency STC (%)	27.14%	27.38%	27.62%	27.85%	28.09%

*STC: Irradiance 1000W/m² Cell Temperature 25°C

NOCT: Irradiance 800W/m² Ambient Temperature 20°C

AM=1.5

AM=1.5

Wind Speed 1m/s