

GCL- NT12/66GDF

695-710W

**Bifacial Dual Glass
Monocrystalline Module**



710W

Maximum Power
Output

22.9%

Maximum Module
Efficiency

0~+5W

Power Output
Guarantee

GCL Delivers Reliable Performance Over Time

- ぼ World-class manufacturer of crystalline silicon photovoltaic modules
- ぼ Fully automatic facility and world-class technology
- ぼ Long term reliability tests
- ぼ 2×100% EL inspection ensuring defect-free modules

Comprehensive System and Product Certifications

- む IEC61215, IEC61730
- む ISO9001:2015 Quality management systems
- む ISO14001:2015 Environmental management systems
- む ISO45001:2018 Occupational health and safety management systems
- む IEC62941:2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing



Ideal choice for large
scale ground installation



Non-destructive cutting,
reduce potential micro crack
risk




N type Technology: The
N-type Module has
better reliability and
lower LID/Letid



Large size silicon wafer
module can reduce the cost of
PV support bracket, combining
manifolds, cable, land and so
on, thus thinning the LCOE

Linear Performance Warranty

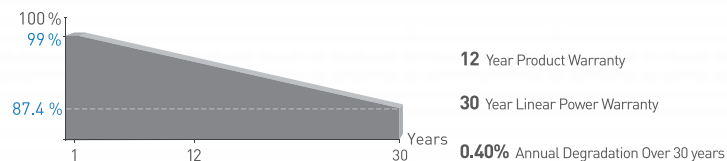

* Please refer to GCL standard warranty for details

Additional Insurance Backed by Swiss RE

* Please refer to GCL for details



Electrical Specification (STC& BNPI) | GCL-NT12/66GDF xxx(xxx=695~710)

Testing Conditions		STC	BNPI	STC	BNPI	STC	BNPI	STC	BNPI
Maximum Power	P _{max} [W]	695	765	700	770	705	775	710	780
Maximum Power Voltage	V _{mp} [V]	39.86	/	40.06	/	40.27	/	40.46	/
Maximum Power Current	I _{mp} [A]	17.44	/	17.47	/	17.51	/	17.55	/
Open Circuit Voltage	V _{oc} [V]	47.55	47.67	47.74	47.85	47.93	48.03	48.12	48.21
Short Circuit Current	I _{sc} [A]	18.35	20.27	18.38	20.31	18.42	20.35	18.46	20.39
Module Efficiency	[%]	22.4		22.5		22.7		22.9	

*STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5 *BNPI: Irradiance of front 1000W/越, rear 135W/越*Measurement uncertainty:±3%P_{max}; Voc Tolerance:±3% I_{sc} Tolerance:±4%

Electrical Specification (NOCT*)

Maximum Power	P _{max} [W]	527.2	530.9	534.8	538.8
Maximum Power Voltage	V _{mp} [V]	37.55	37.73	37.93	38.13
Maximum Power Current	I _{mp} [A]	14.04	14.07	14.10	14.13
Open Circuit Voltage	V _{oc} [V]	45.00	45.20	45.40	45.60
Short Circuit Current	I _{sc} [A]	14.80	14.83	14.86	14.89

* Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

Electrical characteristics with different power bin (reference to 10% Irradiance ratio)

Maximum Power	P _{max} [W]	751.0	755.9	761.5	766.7
Maximum Power Voltage	V _{mp} [V]	39.86	40.06	40.27	40.46
Maximum Power Current	I _{mp} [A]	18.84	18.87	18.91	18.95
Open Circuit Voltage	V _{oc} [V]	47.55	47.74	47.93	48.12
Short Circuit Current	I _{sc} [A]	19.82	19.85	19.89	19.94

Mechanical Data

Number of Cells	132 Cells (6×22)
Dimensions of Module L*W*H (mm)	2384×1303×33mm (93.86×51.30×1.30 inches)
Weight (kg)	38.5 kg
Front Side Glass	2.0mm (0.08 inches), Anti-Reflection Coating
Back Side Glass	2.0mm (0.08 inches), Heat Strengthened Glass
Frame	Anodized aluminium alloy
Cable	4.0mm ² , Portrait: +300/-200mm length can be customized
Fire rating	IEC Class C
Wind/ Snow Load	2400Pa/ 5400Pa*
Protection Class	ClassII
Bifaciality	φP _{max} =80% φV _{oc} =95% φI _{sc} =80% (±5%)

* For more details please check the installation manual of GCLSI

Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of I _{sc}	+0.045%/°C
Temperature Coefficient of V _{oc}	-0.26%/°C
Temperature Coefficient of P _{max}	-0.29%/°C


Maximum Ratings

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Max Series Fuse Rating	35A



Packaging Configuration

Module per box	33 pieces
Module per 40' container	594 pieces


Module Dimension

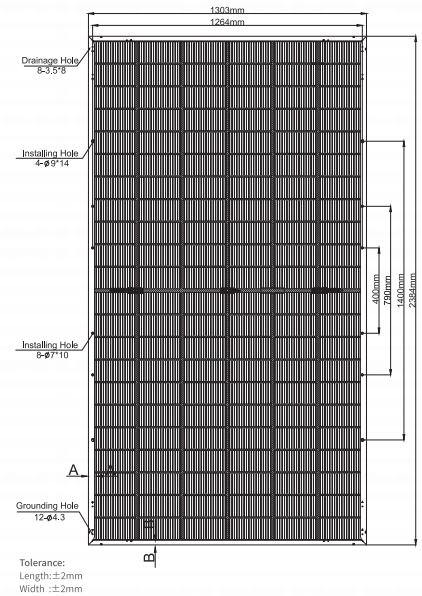


Back View

Long Frame
A-AShort Frame
B-B

I-V Curve at Different Temperature (710W)



I-V/P-V Curve at Different Irradiation (710W)

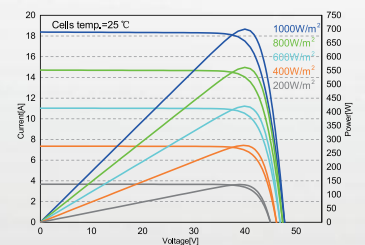

CAUTION: READ INSTALLATION MANUAL BEFORE USING THE PRODUCT

Contact Us for More Information

GCL System Integration Technology Co., Ltd.

Jianghai Economic Zone, Nanqiao Town Fengxian District, 201406 Shanghai P.R. China

website: www.gclsi.com email: gclsisales@gclsi.com



Bringing Green Power To Life

Made in China



Optional/Connector

Serial	Kind of component	Manufacturer	Specification
1	Connector	Suzhou Bright Photovoltaic Electronic Technology Co.,Ltd.	B01
2		Jiangsu Haitian Microelectronics Corp.	PV-HT03x (x=0 or 1 or 2)
3		Hefei GCL System Integration New Energy Technology Co., Ltd.	GCL-01
4			GCL-02
5		Suzhou Xtong Photovoltaic Technologies Co., Ltd.	PV-XT101.1
6			PV-XT101.2
7			XT2
8		Stäubli Electrical Connectors AG	PV-KST4-EVO 2/xy_UR (male)
9			PV-KBT4-EVO 2/xy_UR (female)
10			PV-KST4-EVO2A/xy (male)
11			PV-KBT4-EVO2A/xy (female)

Contact Us for More Information

GCL System Integration Technology Co.,Ltd.

Jianghai Economic Zone, Nanqiao Town Fengxian District,201406 ShanghaiP.R.China

website:www.gclsi.com email:gclsisales@gclsi.com

Made In China



Bringing Green Power To Life