

GCL- NT12R/66GDF

605-620W

**Bifacial Dual Glass
Monocrystalline Module**



620W

Maximum Power
Output

23.0%

Maximum Module
Efficiency

0~+5W

Power Output
Guarantee

GCL Delivers Reliable Performance Over Time

- ☞ World-class manufacturer of crystalline silicon photovoltaic modules
- ☞ Fully automatic facility and world-class technology
- ☞ Long term reliability tests
- ☞ 2×100% EL inspection ensuring defect-free modules

Comprehensive System and Product Certifications

- ☞ IEC61215, IEC61730
- ☞ ISO9001:2015 Quality management systems
- ☞ ISO14001:2015 Environmental management systems
- ☞ ISO45001:2018 Occupational health and safety management systems
- ☞ IEC62941:2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing



Ideal choice for large
scale ground installation



Non-destructive cutting,
reduce potential micro crack
risk




N type Technology: The N-
type Module has
better reliability and
lower LID/Letid



Large size silicon wafer
module can reduce the cost of
PV support bracket, combining
manifolds, cable, land and so
on, thus thinning the LCOE

Linear Performance Warranty

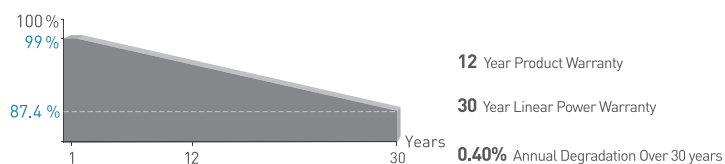

* Please refer to GCL standard warranty for details

Additional Insurance Backed by Swiss RE

* Please refer to GCL for details



Electrical Specification (STC & BNPI) | GCL-NT12R/66GDF xxx(605-620)

Testing Conditions		STC	BNPI	STC	BNPI	STC	BNPI	STC	BNPI
Maximum Power	P _{max} (W)	605	665	610	670	615	675	620	680
Maximum Power Voltage	V _{mp} (V)	40.34	/	40.53	/	40.73	/	40.93	/
Maximum Power Current	I _{mp} (A)	15.00	/	15.05	/	15.10	/	15.15	/
Open Circuit Voltage	V _{oc} (V)	47.95	48.10	48.10	48.25	48.25	48.40	48.40	48.55
Short Circuit Current	I _{sc} (A)	15.80	17.45	15.85	17.50	15.90	17.55	15.95	17.60
Module Efficiency	(%)	22.4		22.6		22.8		23.0	

*STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5 *BNPI: Irradiance of front 1000W/超, rear 135W/超

*Measurement uncertainty:±3%P_{max}; Voc Tolerance:±3% I_{sc} Tolerance:±4%

Electrical Specification (NOCT*)

Maximum Power	P _{max} (W)	454.4	457.8	461.3	464.8
Maximum Power Voltage	V _{mp} (V)	37.74	37.90	38.06	38.22
Maximum Power Current	I _{mp} (A)	12.04	12.08	12.12	12.16
Open Circuit Voltage	V _{oc} (V)	45.16	45.30	45.44	45.58
Short Circuit Current	I _{sc} (A)	12.76	12.80	12.84	12.88

* Irradiance 800W/m² Ambient Temperature 20°C Wind Speed 1m/s

Electrical characteristics with different power bin (reference to 10% Irradiance ratio)

Maximum Power	P _{max} (W)	653.5	658.6	664.3	669.6
Maximum Power Voltage	V _{mp} (V)	40.34	40.53	40.73	40.93
Maximum Power Current	I _{mp} (A)	16.20	16.25	16.31	16.36
Open Circuit Voltage	V _{oc} (V)	47.95	48.10	48.25	48.40
Short Circuit Current	I _{sc} (A)	17.06	17.12	17.17	17.23

Mechanical Data

Number of Cells	132 Cells (6×22)
Dimensions of Module L*W*H (mm)	2382×1134×30mm (93.78×44.65×1.18 inches)
Weight (kg)	32.6 kg
Front Side Glass	2.0mm (0.08 inches), Heat strengthened glass
Back Side Glass	2.0mm (0.08 inches), Heat strengthened glass
Frame	Anodized aluminium alloy
Cable	4.0mm², Portrait: +300/-200mm length can be customized
Fire rating	IEC Class C
Wind/ Snow Load	2400Pa/ 5400Pa*
Protection Class	Class II
Bifaciality	φP _{max} =80% φV _{oc} =95% φI _{sc} =80% (±5%)

* For more details please check the installation manual of GCLSI

Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of I _{sc}	+0.045%/°C
Temperature Coefficient of V _{oc}	-0.25%/°C
Temperature Coefficient of P _{max}	-0.29%/°C

Packaging Configuration

Module per box	36 pieces
Module per 40' container	720 pieces

Optional / Connector

Suzhou Bright Photovoltaic Electronic Technology Co., Ltd.: B01/ B05x


Suzhou Xiong Photovoltaic Technologies Co., Ltd.: XT2, PV- XT101.1, PV- XT101.2

Säubli Electrical Connectors AG :PV- KST4- EVO2A/xy, PV- KBT4- EVO2A/xy & PV- KST4- EVO2/xy, PV- KBT4- EVO2/xy, UR



Maximum Ratings

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Max Series Fuse Rating	35A


Module Dimension

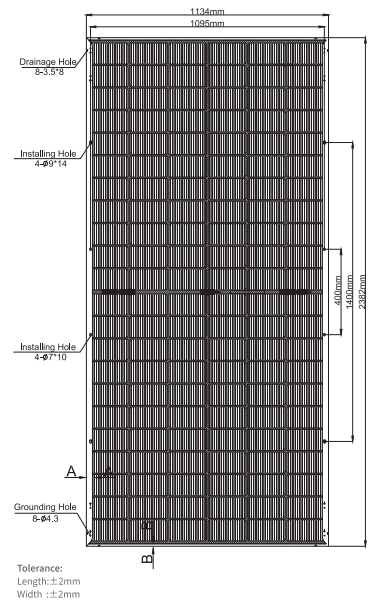


Back View

Long Frame
A-AShort Frame
B-B

I-V Curve at Different Temperature (620W)

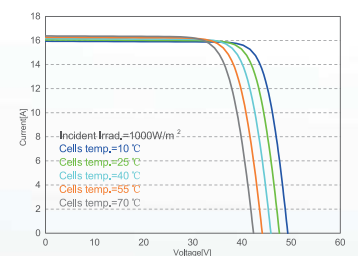

I-V/P-V Curve at Different Irradiation (620W)

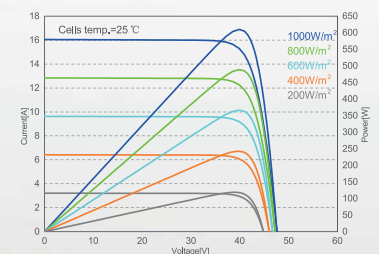

CAUTION: READ INSTALLATION MANUAL BEFORE USING THE PRODUCT

Contact Us for More Information

GCL System Integration Technology Co., Ltd.
 Jianghai Economic Zone, Nanqiao Town Fengxian District, 201406 Shanghai P.R. China
 website: www.gclsi.com email: gclsisales@gclsi.com





Optional/Connector

Serial	Kind of component	Manufacturer	Specification
1	Connector	Suzhou Bright Photovoltaic Electronic Technology Co.,Ltd.	B01
2		Jiangsu Haitian Microelectronics Corp.	PV-HT03x (x=0 or 1 or 2)
3		Hefei GCL System Integration New Energy Technology Co., Ltd.	GCL-01
4			GCL-02
5		Suzhou Xtong Photovoltaic Technologies Co., Ltd.	PV-XT101.1
6			PV-XT101.2
7			XT2
8		Stäubli Electrical Connectors AG	PV-KST4-EVO 2/xy_UR (male)
9			PV-KBT4-EVO 2/xy_UR (female)
10			PV-KST4-EVO2A/xy (male)
11			PV-KBT4-EVO2A/xy (female)

Contact Us for More Information

GCL System Integration Technology Co.,Ltd.

Jianghai Economic Zone, Nanqiao Town Fengxian District,201406 ShanghaiP.R.China

website:www.gclsi.com email:gclsisales@gclsi.com

Made In China



Bringing Green Power To Life