



Neostar 1S

ABC N-Type

Mono-Glass Model

Up to **23.0%**
430W-450W



Product
Warranty



Performance
Warranty



red dot winner 2023

Full Black Design

No front grid lines

Higher Power Output

Higher efficiency: 23.0%

Lower degradation: 1st year $\leq 1.0\%$, Linear Degradation $\leq 0.35\%$

Better temperature coefficient: $-0.26\%/^{\circ}\text{C}$

Optimized Balance of System (BOS)

Significant savings on mounting structure, cabling, and labour costs



Warranty partner



Complete Set of Quality Management System

IEC 61730 (2016) IEC 61215 (2021)

ISO 9001:2015 Quality Management System

ISO 14001:2015 Environmental Management System

ISO 45001:2018 Occupational Safety and Management System




450W
Output

23.0%
Efficiency

≤1%
First-year Degradation

≤0.35%
Annual Degradation from Year 2-30

30-year Linear Performance Warranty

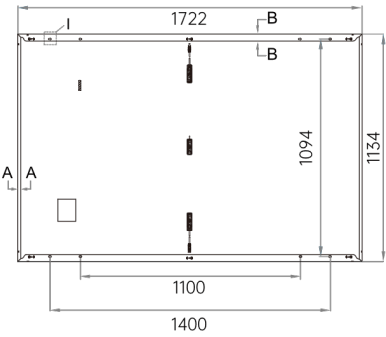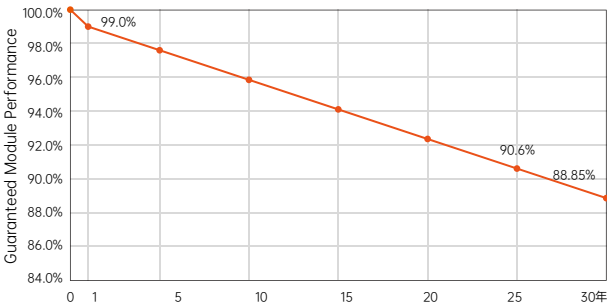

Electrical Characteristics										(STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s)		Power Tolerance:: 0~ + 3%	
Model	AIKO-A430-MAH54Mb		AIKO-A435-MAH54Mb		AIKO-A440-MAH54Mb		AIKO-A445-MAH54Mb		AIKO-A450-MAH54Mb				
Test Conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT			
Pmax [W]	430	324	435	327	440	331	445	335	450	339			
Voc [V]	40.29	38.05	40.39	38.14	40.49	38.24	40.59	38.33	40.69	38.43			
Vmp [V]	33.30	31.45	33.40	31.55	33.50	31.64	33.60	31.73	33.70	31.83			
Isc [A]	13.69	11.07	13.80	11.16	13.91	11.25	14.02	11.33	14.12	11.42			
Imp [A]	12.92	10.31	13.03	10.40	13.14	10.49	13.25	10.57	13.36	10.66			
Module Efficiency	22.0%		22.3%		22.5%		22.8%		23.0%				

Mechanical Specification

Cell Type	N-Type ABC
Front Cover Mono glass	3.2 mm tempered glass
Frame	Black anodized aluminum
Cable	4mm ² (IEC)) 12AWG(UL) 1200mm
No. of Cells	108(6*18)
Junction Box	IP68, 3 bypass diodes
Connector	Original MC4
Weight	20.5kg
Dimension	1722*1134*30mm
Package Detail	36pcs per pallet / 216pcs per 20'GP / 936pcs per 40'HC

Temperature Ratings (STC)

Temperature Coefficient of I _{sc}	+ 0.05%/ °C
Temperature Coefficient of V _{oc}	- 0.22%/ °C
Temperature Coefficient of P _{max}	- 0.26%/ °C

Installation Guide

Operation Temperature	-40°C - +85°C
Maximum Series Fuse Rating	25A
Protection Class	Class II
V _{oc} and I _{sc} Tolerance	±3%
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	25 mm diameter hail at 23 m/s
Fire Rating	IEC Class C



www.aikosolar.com
marketing@aikosolar.com

*AIKO reserves right to update the specification without notice
V5.1_202411_DsDr_EN