

Sable 440-455w

High efficiency bifacial modules

TOPCon 182*210mm

• TOPCon MODULE ADVANTAGE



Multi-Busbar
technology



Superior load
capacity



High module
efficiency



Excellent
low-light
performance



Lower annual
attenuation
Longer warranty



Low BOS and
LCOE



Reduce hot
spot effect



Higher
bifaciality

• QUALITY SYSTEM

ISO9001 / ISO14001 / ISO45001


• PRODUCT CERTIFICATION



• INSURANCE

PICC

• WARRANTY

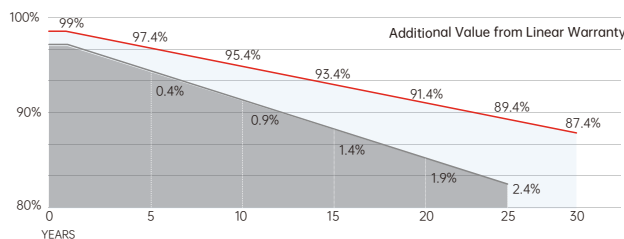

Guarantee on product
material and workmanship



Linear power
output warranty

*Subject to the terms and conditions contained in the applicable Seraphim Solar System Co., Ltd. Warranty Statement. This 30-year product warranty is only applicable for products installed and operating on residential rooftops in certain regions.




Jiangsu Seraphim Solar System Co., Ltd.

Add: NO.10 TongShun road, Henglin Town, Wujin District, Changzhou, Jiangsu Province, China.
Tel: +86-564-7736177 Email: info@seraphim-energy.com

Mechanical Specifications

External Dimension	1762 x 1134 x 30 mm
Weight	24.9 kg
Solar Cells	TOPCon 182 x 105mm (96pcs)
Front / Back Glass	2.0mm AR coating semi-tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0mm ² , 250mm(+) / 350mm(-) or Customized Length
Connector	Genuine MC4 EVO2/Zerun Z4S-abcde/QC Solar QC4.10-cds
Fire Safety Class	Class A

Technical drawing

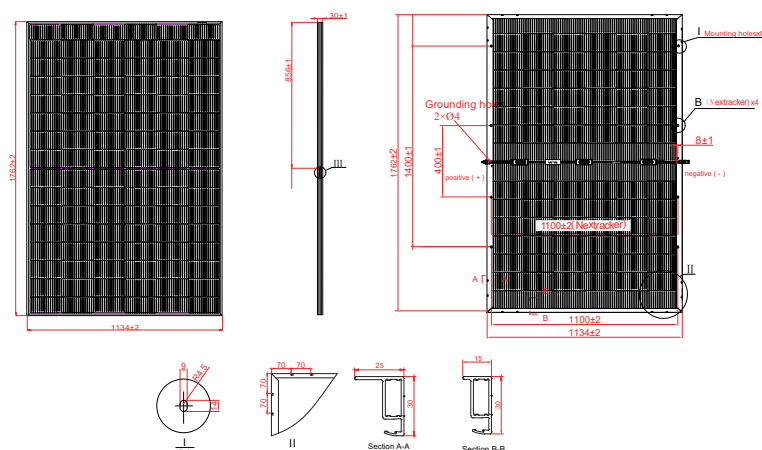

Packing Configuration

Container	20'GP	40'HQ
Pieces per Pallet	36	36
Pallets per Container	6	24
Pieces per Container	216	864

Electrical Characteristics


Module Type	SRP-440-BTE-BG			SRP-445-BTE-BG			SRP-450-BTE-BG			SRP-455-BTE-BG		
	Front STC	Front BNPI	Back STC	Front STC	Front BNPI	Back STC	Front STC	Front BNPI	Back STC	Front STC	Front BNPI	Back STC
Maximum Power -P _{mp} (W)	440	488	352	445	493	356	450	499	360	455	504	364
Open Circuit Voltage -V _{oc} (V)	35.38	35.46	35.36	35.58	35.66	35.56	35.78	35.86	35.76	35.98	36.06	35.96
Short Circuit Current -I _{sc} (A)	15.80	17.51	12.64	15.85	17.56	12.68	15.90	17.62	12.72	15.95	17.67	12.76
Maximum Power Voltage -V _{mp} (V)	29.41	29.49	29.39	29.61	29.69	29.59	29.81	29.89	29.79	30.01	30.09	29.99
Maximum Power Current -I _{mp} (A)	14.97	16.53	11.98	15.03	16.61	12.03	15.10	16.68	12.08	15.17	16.75	12.14
Module Efficiency STC-η _m (%)	22.02			22.27			22.52			22.77		
Power Measurement Tolerance	± 3%											
Power Sorting Tolerance (W)	-5W~+5W											
Pmax Temperature Coefficient	-0.29 %/°C											
Voc Temperature Coefficient	-0.25 %/°C											
Isc Temperature Coefficient	+0.046 %/°C											

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5 Power measurement tolerance: +/-3%; Voltage measurement tolerance: +/-3%; Current measurement tolerance: +/-4%
 BNPI: front 1000 W/m² rear 135 W/m² Power measurement tolerance: +/-3%; Voltage measurement tolerance: +/-3%; Current measurement tolerance: +/-4%

Rear Side Power Gain(SRP-450-BTE-BG)


Power Gain	10%	15%	20%	25%	30%
Maximum Power -P _{mp} (W)	495	518	540	563	585
Open Circuit Voltage -V _{oc} (V)	35.78	35.78	35.78	35.78	35.78
Short Circuit Current -I _{sc} (A)	17.49	18.29	19.08	19.88	20.67
Maximum Power Voltage -V _{mp} (V)	29.81	29.81	29.81	29.81	29.81
Maximum Power Current -I _{mp} (A)	16.61	17.37	18.12	18.88	19.63

I-V Curve

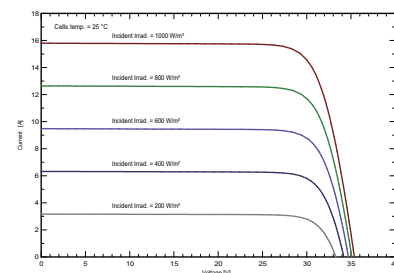

Application Conditions

Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30 A
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature	45±2 °C
Bifaciality	80%±5%
Mechanical Load	Front side 5400 Pa / Back side 2400 Pa

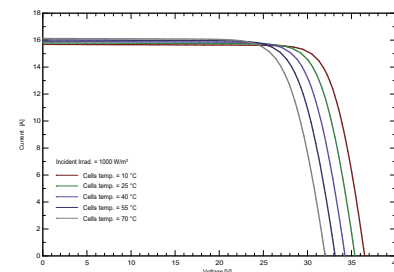

Specifications are subject to change without further notification SRP-DS-EN-2024T0830© Copyright 2024 Seraphim



Jiangsu Seraphim Solar System Co., Ltd.

Add: NO.10 TongShun road, Henglin Town, Wujin District, Changzhou, Jiangsu Province, China.
 Tel: +86-564-7736177 Email: info@seraphim-energy.com