



Walara Series 440W G4P

Built to perform. Backed to last.

🌙 **Australian Made.**

The G4P is the ultimate evolution in Australian renewable energy industry manufacturing. Designed and engineered by a local and experience team based in South Australia.

🌙 **16BB High Efficiency Cells.**

Powered by N-Type TOPCon technology intergrated into premium power class laser-cut 16 busbar bifacial cells for fully opitmised output, efficiency and durability.

🌙 **Intelligent Ultra-Rigid Structure.**

Flex minimising 35mm no cut-back frame designed to protect the cells from micro-cracking and deliver increased integrity and longevity throughout extreme weather conditions.

🌙 **Zero Defect Manufacturing Process.**

Our unique process guarantees that every Tindo panel undergoes rigorous testing at 7 quality checkpoints ensuring high performance for the lifetime of the product.

🌙 **Red Centre Resilience and Durability.**

Our panels are mounted and performing everyday at the DKA Alice Springs. Tindo panels are consistently one of the highest performing panels at the centre. – dkasolarcentre.com.au

🌙 **Market Leading Warranty and Local Support.**

Our local and experienced service, warranty and technical teams offer market leading, comprehensive support throughout the lifetime of your product.



Walara-440G4P

Mechanical Characteristics

Cells per Panel	108 Half Cells
Cell Type	TOPCon N-Type Cells
Panel Dimension	1722 x 1133 x 35 mm
Panel Weight	21.0 Kg
Front Glass	3.2mm Fully tempered double ARC glass
Frame	Anodized aluminum alloy (T6) / Black
Junction Box	3 bypass diodes / IP68 rated
Cable	1200 mm(+/-), 4mm ²
Connector Type	Staubli-MC4-EVO2 / KST4-EVO2(M), KBT4-EVO 2(F)

Thermal Characteristics

RATING	UNIT	VALUE
Operating Temperature	°C	-40 ~ +70
Maximum System Voltage (IEC)	VDC	1500
Maximum Series Fuse Rating	A	30
Nominal Module Operating Temperature	°C	45 ± 2
Temperature Coefficient	Isc	%/°C 0.045
	Voc	%/°C -0.25
	Pmax	%/°C -0.3

Qualification Test

Thermal Cycling Test	- 40°C to 85°C for 200 cycles
Damp Heat Test	85°C and 85% relative humidity for 1000 hr
Mechanical Load Test	5400Pa (Front) / 2400Pa (Rear)
PID Test	1500 VDC, 96h, 85% RH, 85°C
Hail Impact Test	25mm hail at 23 m/s from 1m distance

Cyclone tested by Structural Engineering Consultants Australia (SECA) Pty Ltd - certificate available on request

Safety factor of *static load test: 1.5 (Test load = Design load x Safety factor)
NexTracker installation : Front load 1800 Pa / Back Load 1800 Pa

Safety Ratings & Warranties

Safety Application Class	Class II
Fire Safety Classification	Class C
Certifications	IEC 61215 , IEC 61730
Warranty	25 years limited product warranty
Performance Guarantee	25 years limited warranty 87.4% power



Electrical Characteristics

108HC Cell Module	Walara-440G4P		
ITEM	UNIT	STC*	NMOT**
Max. Power (Pmax)	Wp	440	335.3
Max. Power Voltage (Vmp)	V	33.36	31.45
Max. Power Current (Imp)	A	13.19	10.66
Open Circuit Voltage (Voc)	V	39.99	38.01
Short Circuit Current (Isc)	A	13.90	11.20
Module Efficiency	%	22.6	
Positive Power Tolerance	W	0 ~ + 5	

*STC (Standard Test Condition): 1,000 W/m² , AM 1.5, 25°C

**NMOT(Nominal Module Operating Temperature) : Irradiance at 800W/m, Ambient Temperature 20°C, Wind Speed 1m/s, air mass of AM1.5

Tolerance of Measuring Pmax, Voc & Isc ± 3% within each watt class at STC

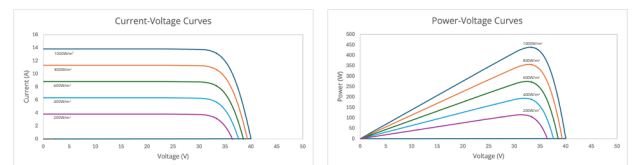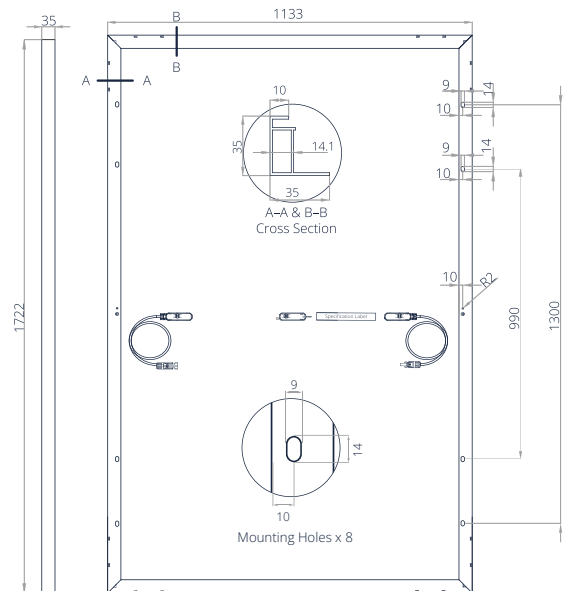

Graphs for Current-Voltage and Power-Voltage based on 440W

Packaging

Stacking Method	Horizontal	Vertical (Optional)
Panels per Pallet	30	30
Loading Capacity (40HQ)	600	780

• The specifications included in this datasheet are subject to change without notice.
• The electrical data given here is for reference purpose only.
• Manufactured in Australia by Tindo Operations Co Pty Ltd