


Jäger Plus

HIGH PERFORMANCE
BIFACIAL PERC MONOCRYSTALLINE MODULE

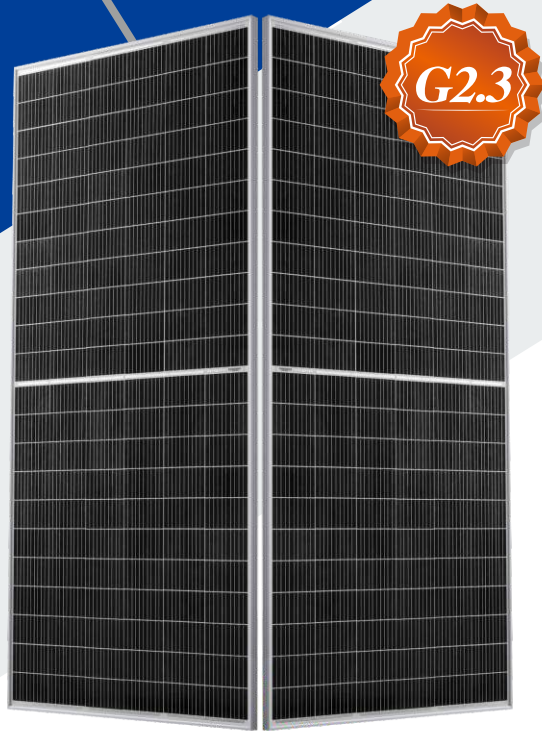

RSM132-6-360BMDG-380BMDG

132 CELL Mono PERC Module	360-380Wp Power Output Range
1500VDC Maximum System Voltage	20.3% Maximum Efficiency

KEY SALIENT FEATURES

- Global, Tier 1 bankable brand, with independently certified state-of-the-art automated manufacturing
- Bifacial technology enables additional energy harvesting from rear side (up to 30%)
- Industry leading lowest thermal co-efficient of power
- Industry leading 12 years product warranty
- Excellent low irradiance performance
- Excellent PID resistance
- Positive tight power tolerance
- Dual stage 100% EL Inspection warranting defect-free product
- Module Imp binning radically reduces string mismatch losses
- Warranted reliability and stringent quality assurances well beyond certified requirements
- Certified to withstand severe environmental conditions
 - Anti-reflective & anti-soiling surface minimise power loss from dirt and dust
 - Severe salt mist, ammonia & blown sand resistance, for seaside, farm and desert environments
 - Excellent mechanical load 2400Pa & snow load 5400Pa resistance



RISEN ENERGY CO., LTD.


Risen Energy is a leading, global tier 1 manufacturer of high-performance solar photovoltaic products and provider of total business solutions for residential, commercial and utility-scale power generation. The company, founded in 1986, and publicly listed in 2010, compels value generation for its chosen global customers. Techno-commercial innovation, underpinned by consummate quality and support, encircle Risen Energy's total Solar PV business solutions which are among the most powerful and cost-effective in the industry. With local market presence and strong financial bankability status, we are committed, and able, to building strategic, mutually beneficial collaborations with our partners, as together we capitalise on the rising value of green energy.

Tashan Industry Zone, Meilin, Ninghai 315609, Ningbo | PRC
Tel: +86-574-59953239 Fax: +86-574-59953599
E-mail: marketing@risenenergy.com Website: www.risenenergy.com



LINEAR PERFORMANCE WARRANTY



12 year Product Warranty / 30 year Linear Power Warranty

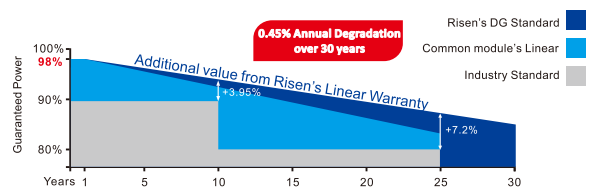

★ Please check the valid version of Limited Product Warranty which is officially released by Risen Energy Co., Ltd

Dimensions of PV Module

Unit: mm

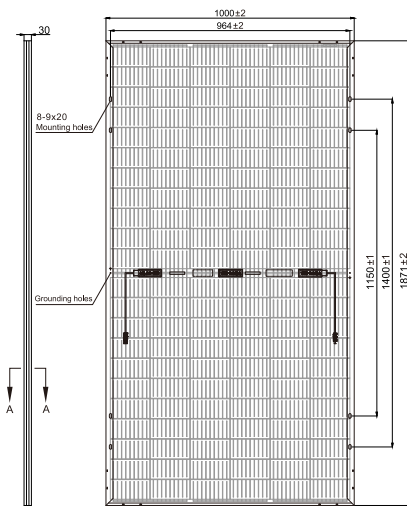

ELECTRICAL DATA (STC)

Model Number	RSM132-6-360BMDG	RSM132-6-365BMDG	RSM132-6-370BMDG	RSM132-6-375BMDG	RSM132-6-380BMDG
Rated Power in Watts-Pmax(Wp)	360	365	370	375	380
Open Circuit Voltage-Voc(V)	44.00	44.10	44.20	44.30	44.40
Short Circuit Current-Isc(A)	10.29	10.38	10.48	10.58	10.68
Maximum Power Voltage-Vmpp(V)	37.20	37.35	37.50	37.65	37.80
Maximum Power Current-Imp(A)	9.69	9.79	9.88	9.97	10.07
Module Efficiency (%) *	19.2	19.5	19.8	20.0	20.3

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.
Bifacial factor: 70%±5 * Module Efficiency (%): Round-off to the nearest number

Electrical characteristics with different rear side power gain (reference to 370Wp front)

Bifacial Gain *	Pmax/W	Voc/V	Isc/A	Vmpp/V	Imp/A
5%	389	40.20	11.00	37.50	10.37
10%	408	40.20	11.53	37.50	10.87
15%	426	40.20	12.05	37.50	11.36
20%	445	40.20	12.58	37.50	11.86
25%	463	40.20	13.10	37.50	12.35
30%	482	40.20	13.62	37.50	12.84

*Bifacial Gain: The additional gain from the rear side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

ELECTRICAL DATA (NMOT)

Model Number	RSM132-6-360BMDG	RSM132-6-365BMDG	RSM132-6-370BMDG	RSM132-6-375BMDG	RSM132-6-380BMDG
Maximum Power-Pmax (Wp)	269.5	273.2	276.9	280.7	284.4
Open Circuit Voltage-Voc (V)	40.50	40.60	40.70	40.80	40.85
Short Circuit Current-Isc (A)	8.44	8.52	8.59	8.68	8.76
Maximum Power Voltage-Vmpp (V)	34.10	34.20	34.40	34.50	34.62
Maximum Power Current-Imp (A)	7.91	7.99	8.06	8.14	8.21

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Monocrystalline
Cell configuration	132 cells (6×11+6×11)
Module dimensions	1871×1000×30mm
Weight	24.5kg
Superstrate	High Transmission, Low Iron, Tempered ARC Glass
Substrate	Tempered Glass
Frame	Anodized Aluminium Alloy type 6063T5, Silver Color
J-Box	Potted, IP68, 1500VDC, 3 Schottky bypass diodes
Cables	4.0mm ² (12AWG), Positive(+)350mm, Negative(-)350mm (Connector Included)
Connector	Risen Twinsel PV-SY02, IP68

TEMPERATURE & MAXIMUM RATINGS



Nominal Module Operating Temperature (NMOT)	44°C±2°C
Temperature Coefficient of Voc	-0.28%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.36%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	20A
Limiting Reverse Current	20A

PACKAGING CONFIGURATION

	40ft(HQ)	20ft
Number of modules per container	840	420
Number of modules per pallet	35	35
Number of pallets per container	24	12
Packaging box dimensions (LxWxH) in mm	1940×1130×1135	1940×1130×1135
Box gross weight[kg]	910	910

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

©2020 Risen Energy. All rights reserved. Specifications included in this datasheet are subject to change without notice.

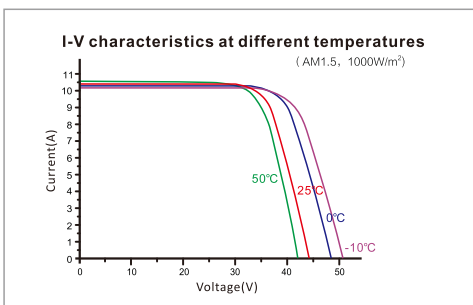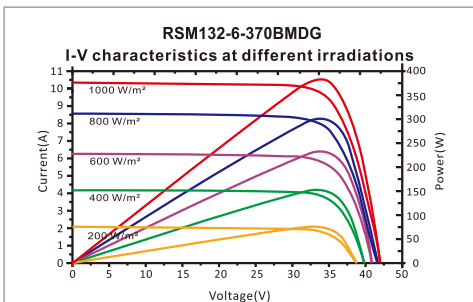

Our Partners: