
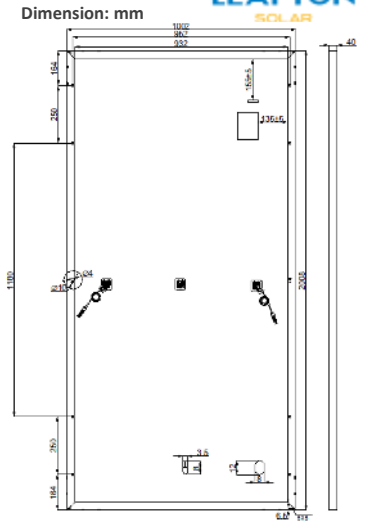


Mono Poly

## LP158\*158-M-72-H

### Rated Power 380-400W

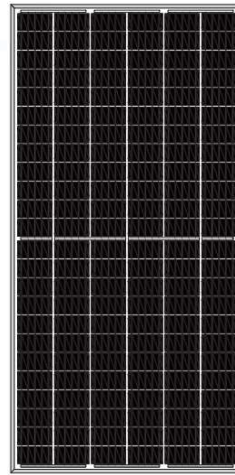

Product Series	LP158*158-M-72-H				
Power	380W	385W	390W	395W	400W
Open Circuit Voltage	48.90V	49.10V	49.30V	49.50V	49.70V
Short Circuit Current	9.95A	10.04A	10.12A	10.21A	10.30A
Maximum Power Voltage	40.50V	40.75V	41.00V	41.25V	41.50V
Maximum Power Current	9.38A	9.45A	9.51A	9.58A	9.64A
Module Efficiency	18.9%	19.1%	19.4%	19.6%	19.9%

Product Characteristics			
Weight	22.5kg	Junction Box	IP68
Module Size	2008*1002*40mm	Frame	Aluminum Alloy
Cell Amount	72*2 pcs	Cable	4mm <sup>2</sup> , Landscape:N 1300mm/P 1300mm, Portrait: N 150mm/P 300mm
Cell Size	158.75*79.38mm	Connection	SIKE6/GZX1500
Maximum System Voltage	1500V	Application Level	Class A




Packing Configuration			
Modules/Pallet	26 pieces	Modules/40' container	572 pieces
Packing Description	22 Pallets, Total=26 X22=572		

Temperature Characteristics		Maximum Rating	
NOCT	45±2°C	Output Tolerance	±3%W
Temp Coefficient of ISC	+0.05%/°C	Operating Temperature	-40°C~+85°C
Temp Coefficient of VOC	-0.28%/°C	Wind Load/Snow Load	2400pa/5400pa
Temp Coefficient of Pmax	-0.36%/°C	Fuse Current	15A




•10-YEAR 90% Maximum Output

•25-YEAR 80% Maximum Output

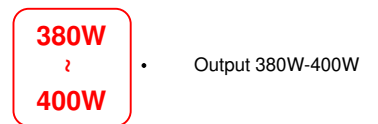

Current-Voltage Curve at Various Light Levels

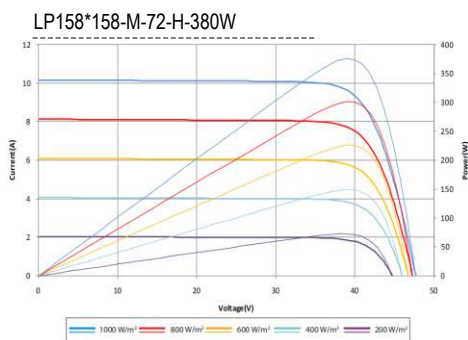

Output at Various Temperatures

