

SOLAR'S MOST TRUSTED



REC N-PEAK SERIES

PREMIUM MONO N-TYPE
SOLAR PANELS WITH
SUPERIOR PERFORMANCE



MONO N-TYPE: THE
MOST EFFICIENT C-SI
TECHNOLOGY



NO LIGHT INDUCED
DEGRADATION



SUPER-STRONG
FRAME UP TO 7000 PA
SNOW LOAD




FLEXIBLE
INSTALLATION
OPTIONS



IMPROVED
PERFORMANCE IN
SHADED CONDITIONS



GUARANTEED HIGH
POWER OVER LIFETIME

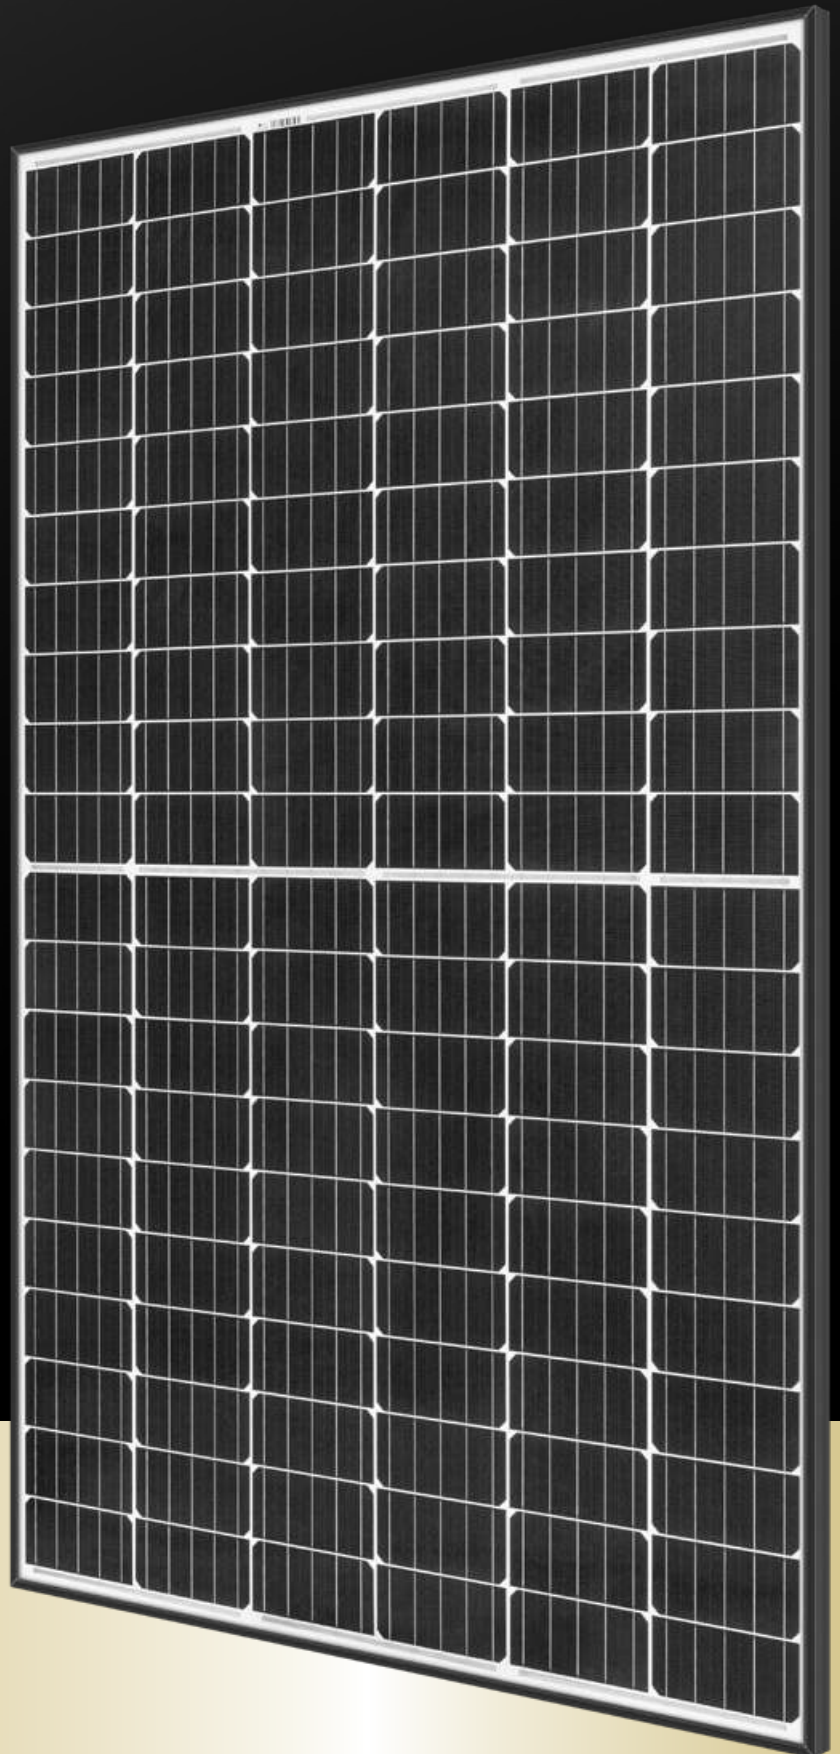


330
WP
POWER



ELIGIBLE FOR

REC N-PEAK SERIES

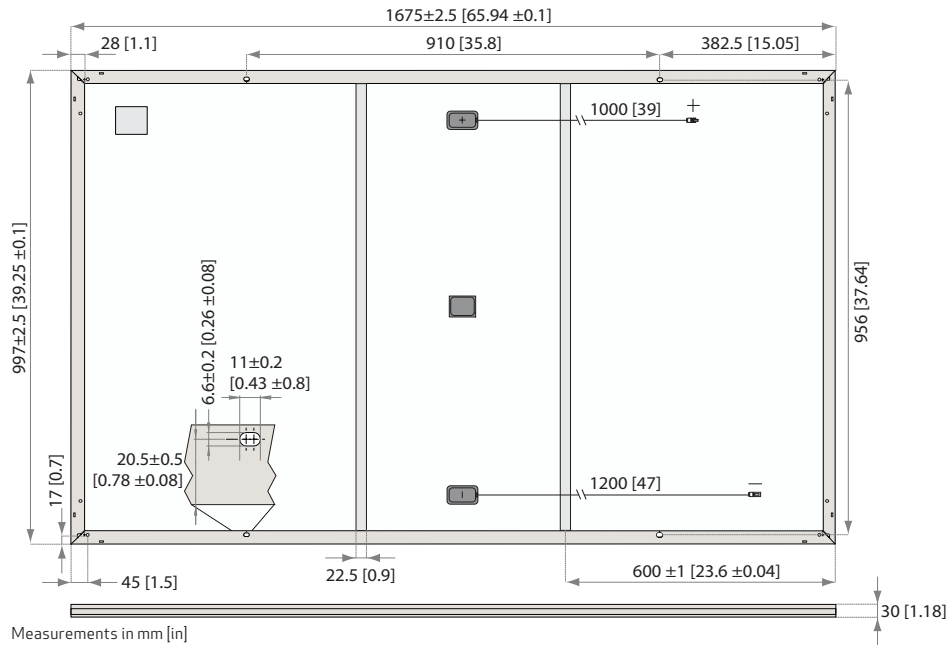

ELECTRICAL DATA @ STC

Product code*: RECxxxNP

	305	310	315	320	325	330
Nominal Power - P_{MAX} (Wp)	305	310	315	320	325	330
Watt Class Sorting - (W)	0/+5	0/+5	0/+5	0/+5	0/+5	0/+5
Nominal Power Voltage - V_{MPP} (V)	33.3	33.6	33.9	34.2	34.4	34.6
Nominal Power Current - I_{MPP} (A)	9.17	9.24	9.31	9.37	9.46	9.55
Open Circuit Voltage - V_{OC} (V)	39.3	39.7	40.0	40.3	40.7	41.0
Short Circuit Current - I_{SC} (A)	10.06	10.12	10.17	10.22	10.28	10.33
Panel Efficiency (%)	18.3	18.6	18.9	19.2	19.5	19.8

Values at standard test conditions (STC: air mass AM1.5, irradiance 1000 W/m², temperature 25°C), based on a production spread with a tolerance of P_{MAX} , V_{OC} & I_{SC} ±3% within one watt class. * Where xxx indicates the nominal power class (P_{MAX}) at STC above.

ELECTRICAL DATA @ NOCT

Product code*: RECxxxNP

	214	217	221	224	228	231
Nominal Power - P_{MAX} (Wp)	214	217	221	224	228	231
Nominal Power Voltage - V_{MPP} (V)	31.1	31.4	31.7	32.0	32.2	32.4
Nominal Power Current - I_{MPP} (A)	6.86	6.91	6.97	7.01	7.08	7.14
Open Circuit Voltage - V_{OC} (V)	36.7	37.1	37.4	37.7	38.0	38.3
Short Circuit Current - I_{SC} (A)	7.53	7.57	7.61	7.65	7.69	7.73

Nominal operating cell temperature (NOCT: air mass AM1.5, irradiance 800 W/m², temperature 20°C, windspeed 1 m/s).

* Where xxx indicates the nominal power class (P_{MAX}) at STC above.

CERTIFICATIONS



UL 1703 (Fire Type 2), IEC 61215, IEC 61730 & UL 1703; UL 61730, MCS 005, IEC 62804, IEC 61701, IEC 62716, IEC 62782
ISO 9001: 2015, ISO 14001: 2004, OHSAS 18001: 2007

WARRANTY

	Standard	RECProTrust	
Installed by an REC Certified Solar Professional	No	Yes	Yes
System size	any	≤25kW	25-500kW
Product Warranty (yrs)	20	25	25
Power Warranty (yrs)	25	25	25
Labor Warranty (yrs)	0	25	10
Power in Year 1	98%	98%	98%
Annual Degradation	0.5%	0.5%	0.5%
Power in Year 25	86%	86%	86%

See warranty documents for details. Some conditions apply.

GENERAL DATA

Cell type:	120 half-cut n-type mono c-Si cells 6 strings of 20 cells in series
Glass:	0.13" (3.2 mm) solar glass with anti-reflection surface treatment
Backsheet:	Highly resistant polymeric construction
Frame:	Anodized aluminum (black)
Junction box:	3-part, 3 bypass diodes, IP67 rated in accordance with IEC 62790
Cable:	12 AWG (4 mm ²) PV wire, 39+47" (1m+1.2m) in accordance with EN 50618
Connectors:	Stäubli MC4 PV-KBT4/KST4, 12 AWG (4 mm ²) in accordance with IEC 62852 IP68 only when connected
Origin:	Made in Singapore

MECHANICAL DATA

Dimensions:	65.9 x 39.25 x 1.1" (1675 x 997 x 30 mm)
Area:	17.98 ft ² (1.67 m ²)
Weight:	39.7 lbs (18 kg)

MAXIMUM RATINGS

Operational temperature:	-40 ... +85°C
Maximum system voltage:	1000 V
Design load (+): snow	4666 Pa (97.5 lbs/ft ²)*
Maximum test load (+):	7000 Pa (146 lbs/ft ²)*
Design load (-): wind	1600 Pa (33.4 lbs/ft ²)*
Maximum test load (-):	2400 Pa (50 lbs/ft ²)*
Max series fuse rating:	20 A
Max reverse current:	20 A

* Calculated using a safety factor of 1.5

* See installation manual for mounting instructions


TEMPERATURE RATINGS *

Nominal Operating Cell Temperature:	44°C (±2°C)
Temperature coefficient of P_{MAX} :	-0.35 %/°C
Temperature coefficient of V_{OC} :	-0.27 %/°C
Temperature coefficient of I_{SC} :	0.04 %/°C

* The temperature coefficients stated are linear values

LOW LIGHT BEHAVIOUR

Typical low irradiance performance of module at STC.

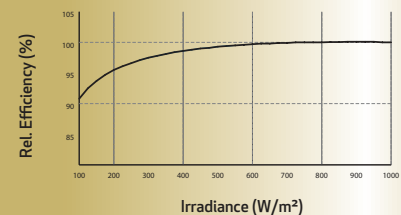

Founded in Norway in 1996, REC is a leading vertically integrated solar energy company. Through integrated manufacturing from silicon to wafers, cells, high-quality panels and extending to solar solutions, REC provides the world with a reliable source of clean energy. REC's renowned product quality is supported by the lowest warranty claims rate in the industry. REC is a Bluestar Elkem company with headquarters in Norway and operational headquarters in Singapore. REC employs around 2,000 people worldwide, producing 1.5 GW of solar panels annually.