

# Cheetah HC 60MB 310-330 Watt

MONO PERC HALF CELL MODULE

Positive power tolerance of 0~+3%

- Half Cell
- Mono PERC 60 Cell

(Made in China)



PERC



## KEY FEATURES



### 5 Busbar Solar Cell

5 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



### High Efficiency

Higher module conversion efficiency (up to 20.45%) benefit from half cell structure (low resistance characteristic).



### PID Resistance

Excellent Anti-PID performance guarantee limited power degradation for mass production.



### Low-light Performance

Advanced glass and cell surface textured design ensure excellent performance in low-light environment.




### Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




### Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance certified by TUV NORD.

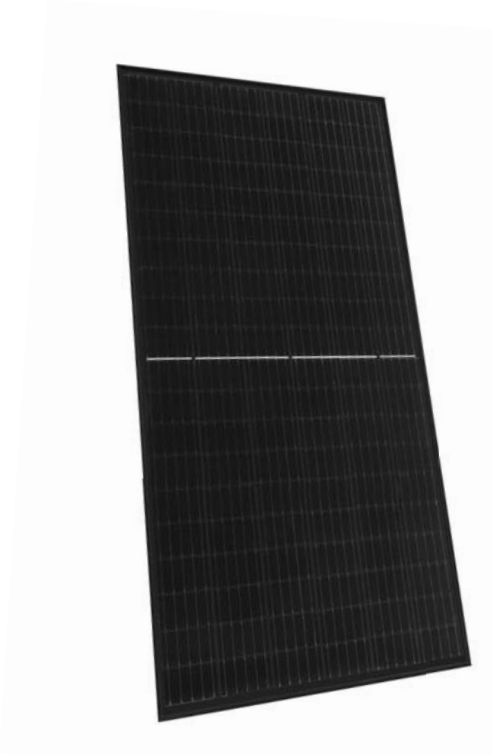


## LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty • 25 Year Linear Power Warranty

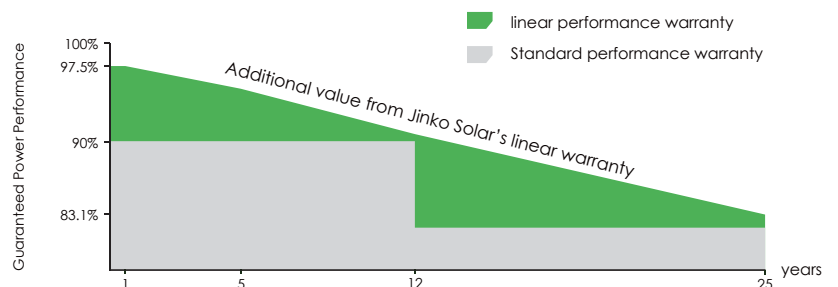

- ISO9001:2015, ISO14001:2015, OHSAS18001 certified factory
- IEC61215, IEC61730, UL1703 certified product

## Engineering Drawings

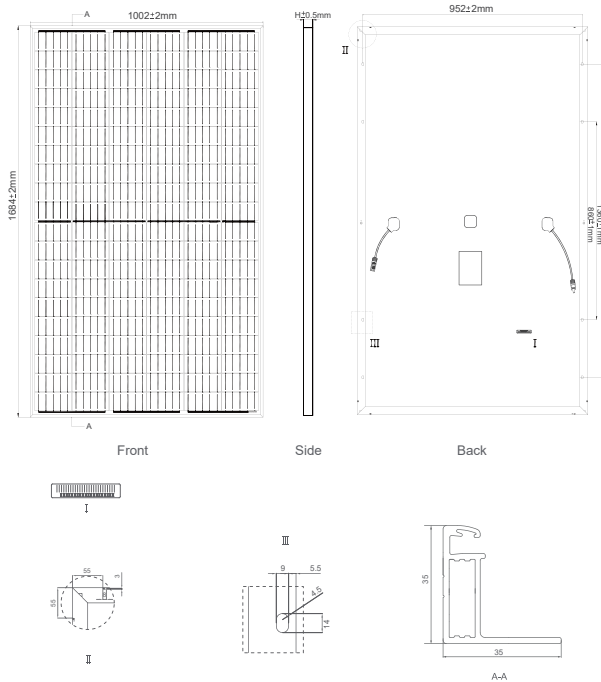


## Packaging Configuration

(Two pallets = One stack)

31pcs/pallet, 62pcs/stack, 806pcs/40'HQ Container

## Electrical Performance & Temperature Dependence

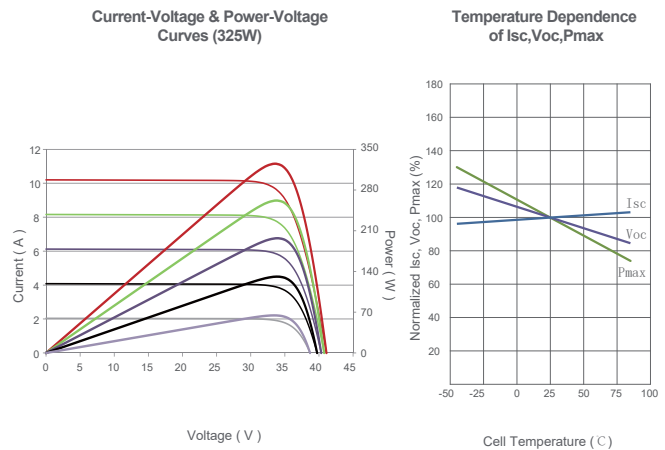

## Mechanical Characteristics

Cell Type	Mono PERC 158.75×158.75mm
No. of Half-cells	120 (6×20)
Dimensions	1684×1002×35mm (66.30×39.45×1.38 inch)
Weight	19.0 kg (41.9 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TÜV 1x4.0mm <sup>2</sup> , (+) 290mm, (-) 145mm or Customized Length
Connector	Jinko JK03M, Genuine MC4

## SPECIFICATIONS

Module Type	JKM320M-60HB		JKM325M-60HB		JKM330M-60HB		JKM335M-60HB		JKM340M-60HB	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	320Wp	239Wp	325Wp	242Wp	330Wp	246Wp	335Wp	242Wp	340Wp	246Wp
Maximum Power Voltage (Vmp)	33.4V	31.4V	33.6V	31.6V	33.8V	31.8V	34.0V	32.0V	34.2V	32.2V
Maximum Power Current (Imp)	9.59A	7.62A	9.68A	7.66A	9.77A	7.74A	9.86A	7.82A	9.95A	7.86A
Open-circuit Voltage (Voc)	40.9V	37.8V	41.1V	38.0V	41.3V	38.2V	41.5V	38.4V	41.7V	38.6V
Short-circuit Current (Isc)	10.31A	8.44A	10.5A	8.54A	10.61A	8.65A	10.73A	8.74A	10.82A	8.86A
Module Efficiency STC (%)	18.96%		19.26%		19.56%		19.86%		20.16%	
Operating Temperature (°C)	-40°C~+85°C									
Maximum System Voltage	1000VDC (IEC)									
Maximum Series Fuse Rating	20A									
Power Tolerance	0~+3%									
Temperature Coefficients of Pmax	-0.36%/°C									
Temperature Coefficients of Voc	-0.28%/°C									
Temperature Coefficients of Isc	0.048%/°C									
Nominal Operating Cell Temperature (NOCT)	45±2°C									

STC: Irradiance 1000W/m<sup>2</sup> Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m<sup>2</sup> Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

\* Power measurement tolerance: ± 3%