

THE TALLMAX^M

FRAMED 72 LAYOUT MODULE



72 LAYOUT
MONOCRYSTALLINE MODULE

390-415W
POWER OUTPUT RANGE

20.4%
MAXIMUM EFFICIENCY

0~+5W
POSITIVE POWER TOLERANCE

PRODUCTS

TSM-DD15M(II)

POWER RANGE

390-415W



High power output

- Combined with MBB technology, maximum 415W
- Reduce BOS cost with higher power bin



Half-cell design brings higher efficiency

- Half-Cell layout (144 monocrystalline)
- Low thermal coefficients for greater energy production at high operating temperature
- Low cell connection power loss due to half-cell layout (144 monocrystalline)
- Passivated Emitter and Rear Cell (PERC Technology)



Highly reliable due to stringent quality control

- Over 30 in-house tests (UV, TC, HF etc)
- Internal test requirement of Trina more stringent than certification authority
- 100% EL double inspection



Certificated to withstand the most challenging environmental conditions:

- 2400 Pa negative load
- 5400 Pa positive load
- * 2400/5400 is the measured load, and the safety factor is 1.5 times

Founded in 1997, Trina Solar is the world's leading comprehensive solutions provider for solar energy. We believe close cooperation with our partners is critical to success. Trina Solar now distributes its PV products to over 60 countries all over the world. Trina is able to provide exceptional service to each customer in each market and supplement our innovative, reliable products with the backing of Trina as a strong, bankable partner. We are committed to building strategic, mutually beneficial collaboration with installers, developers, distributors and other partners.

Comprehensive Products And System Certificates


IEC61215/IEC61730

ISO 9001: Quality Management System


ISO 14001: Environmental Management System

ISO 14064: Greenhouse gases Emissions Verification


OHSAS 18001: Occupation Health and Safety Management System

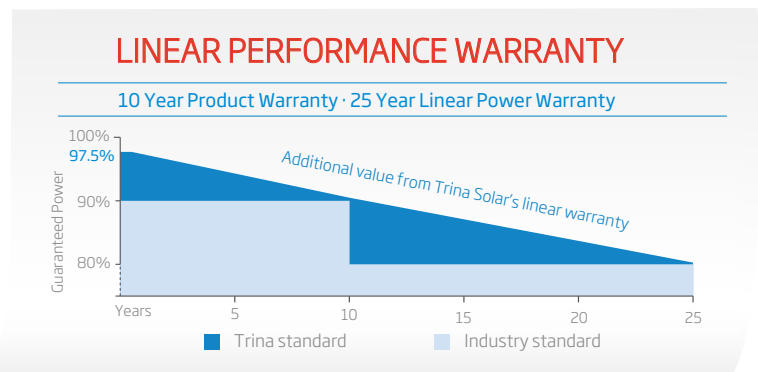


DIMENSIONS OF PV MODULE(mm)

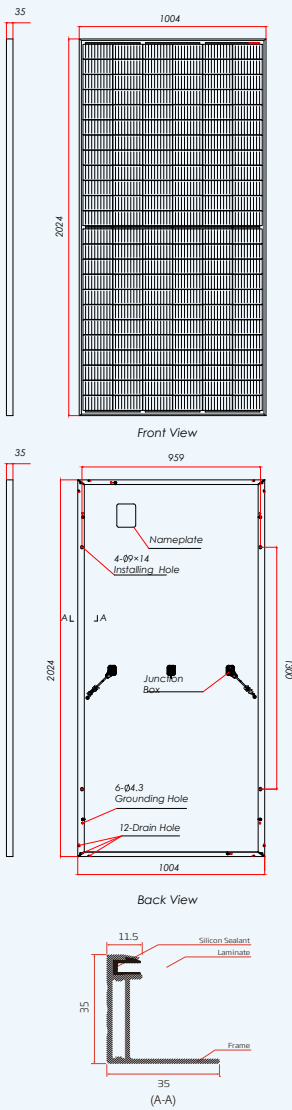

I-V CURVES OF PV MODULE(405W)

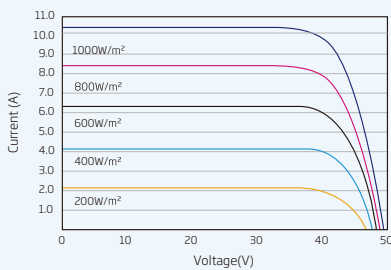

P-V CURVES OF PV MODULE(405W)

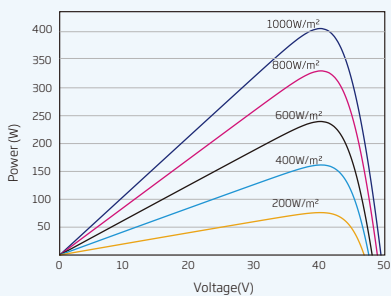

ELECTRICAL DATA (STC)

Peak Power Watts-P _{MAX} (Wp)*	390	395	400	405	410	415
Power Output Tolerance-P _{MAX} (W)	0 ~ +5					
Maximum Power Voltage-V _{MPP} (V)	40.0	40.1	40.3	40.5	40.7	40.9
Maximum Power Current-I _{MPP} (A)	9.75	9.86	9.92	10.00	10.07	10.15
Open Circuit Voltage-V _{OC} (V)	48.5	48.7	49.0	49.2	49.4	49.6
Short Circuit Current-I _{SC} (A)	10.30	10.37	10.45	10.52	10.59	10.66
Module Efficiency η _m (%)	19.2	19.4	19.7	19.9	20.2	20.4

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.

*Measuring tolerance: ±3%.

ELECTRICAL DATA (NMOT)

Maximum Power-P _{MAX} (Wp)	294	298	302	305	309	313
Maximum Power Voltage-V _{MPP} (V)	37.6	37.7	37.9	38.1	38.3	38.4
Maximum Power Current-I _{MPP} (A)	7.83	7.90	7.96	8.02	8.08	8.13
Open Circuit Voltage-V _{OC} (V)	45.6	45.8	46.1	46.3	46.5	46.7
Short Circuit Current-I _{SC} (A)	8.30	8.36	8.43	8.48	8.54	8.60

NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
Cell Orientation	144 cells (6 × 24)
Module Dimensions	2024 × 1004 × 35 mm (79.69 × 39.53 × 1.38 inches)
Weight	22.8kg (50.3lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant Material	EVA
Backsheet	White
Frame	35 mm (inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), Portrait: N 140mm/P 285mm(5.51/11.22inches) Landscape: N 1400 mm /P 1400 mm (55.12/55.12 inches)
Connector	MC4 / TS4

TEMPERATURE RATINGS

NMOT (Nominal Module Operating Temperature)	41 C (±3 C)
Temperature Coefficient of P _{MAX}	-0.37%/ C
Temperature Coefficient of V _{OC}	-0.29%/ C
Temperature Coefficient of I _{SC}	0.05%/ C

(DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection)

MAXIMUM RATINGS

Operational Temperature	-40~+85 C
Maximum System Voltage	1000V DC (IEC) 1000V DC (UL)
Max Series Fuse Rating	20A

WARRANTY

10 year Product Workmanship Warranty
25 year Linear Power Warranty

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 30 pieces
Modules per 40' container: 660 pieces

