


HT54-18X(N)

Single Glass TOPCon PV Module

HIGH High power

HT54-18X(N)
420W/425W/430W
435W/440W

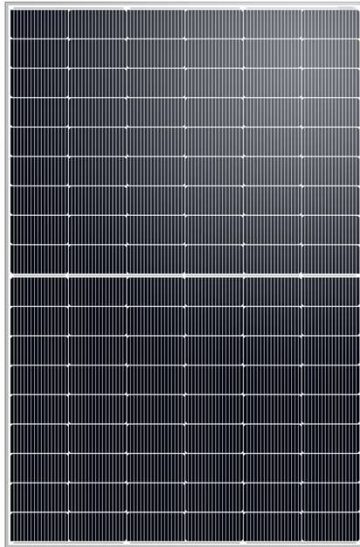

- Module Efficiency Up To 22.5%
- No. of Cells: 108 (6×18)
- Weight: 21.0 (±0.5) kg
- Dimensions: 1722×1134×30mm
- Cell Dimensions: 182×91mm
- For Australian market



MULTIWAY+

Shanghai Aerospace Automobile Electromechanical Co., Ltd.
 Website: www.ht-saae.com.au
 Address: 222 Caoxi Rd, 8th Floor of Spaceflight

Made in China



Half-cut cell technology reducing internal power loss and improving module overall power; offer excellent heat dissipation helping to avoid hot spot production.

30Yrs

Product warranty for All Rooftop Installations; 12Yrs for Ground Mounted

30Yrs

Warranty on Power Output

EL Tested

Microcrack resistant for enhance reliability, double EL tested of high level of quality control.




Entire module certified to with stand extreme wind (2400 Pa) and snow loads (5400 Pa)

TOPCon

The optimised number and width of main gate lines, maximising light receiving area and reducing module power consumption.



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximising system output.


Anti-PID

PID resistant (optional)

Low Degradation Rate**

Comprehensive and first-rate certification system

IEC 61215:2016. IEC 61730:2016 Latest Standard ISO 9001, ISO 14001 and ISO 45001, meeting the highest international standards Strict quality control



HT54-18X(N)-420W/425W/430W/435W/440W

Electrical Characteristics (STC)


Module Type	HT54-18X(N)				
Maximum Power(Pmax)	420W	425W	430W	435W	440W
Open Circuit Voltage(Voc)	38.1V	38.2V	38.3V	38.4V	38.6V
Short Circuit Current(Isc)	14.07A	14.15A	14.23A	14.31A	14.39A
Maximum Power Voltage(Vmp)	31.5V	31.7V	31.9V	32.0V	32.2V
Maximum Power Current(Imp)	13.34A	13.42A	13.50A	13.60A	13.68A
Module Efficiency	21.5%	21.8%	22.0%	22.3%	22.5%
Power Tolerance	±3%W				
Maximum System Voltage	1500V DC(IEC)				
Maximum Series Fuse Rating	25A				
Operating Temperature	-40°C to +85°C				

* STC: AM 1.5, Irradiance 1000W/m², module temperature 25°C


Electrical Characteristics (NMOT)

Module Type	HT54-18X(N)				
Maximum Power(Pmax)	319W	323W	327W	331W	335W
Open Circuit Voltage(Voc)	36.6V	36.7V	36.8V	36.9V	37.1V
Short Circuit Current(Isc)	11.34A	11.40A	11.47A	11.53A	11.60A
Maximum Power Voltage(Vmp)	30.2V	30.4V	30.6V	30.7V	30.9V
Maximum Power Current(Imp)	10.56A	10.63A	10.69A	10.78A	10.84A


* NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

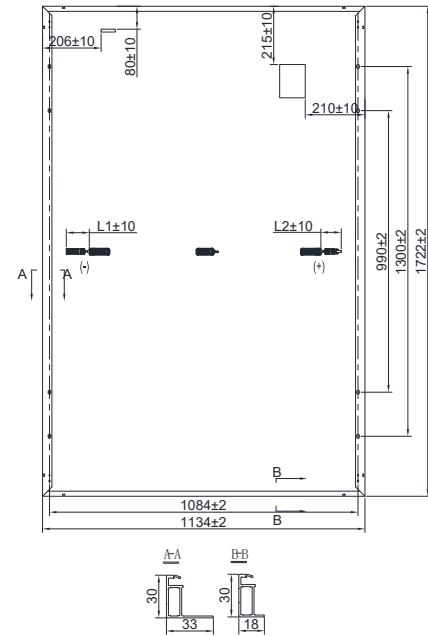

IV Curves

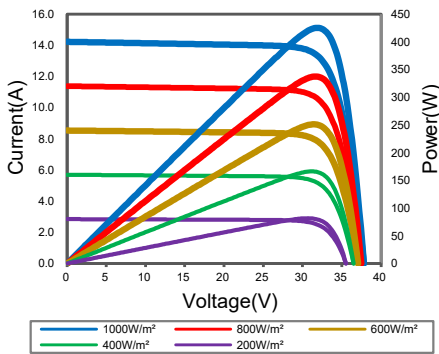

Warranty

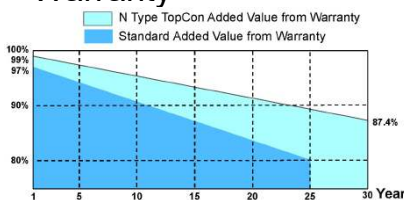

12/30-year product warranty*

**Less than 0.4% annual degradation rate over 30-year power output warranty*

* Specific information is referred to the product quality guarantee

Nominal Module Operating Temperature(NMOT)	43±2°C
Temperature Coefficient of Pmax	γ (Pm) -0.31%/°C
Temperature Coefficient of Voc	β (Voc) -0.25%/°C
Temperature Coefficient of Isc	α (Isc) 0.046%/°C
Solar Cells	Monocrystalline 182× 91mm
No. of Cells	108 (6×18)
Dimensions	1722mm×1134mm×30mm
Weight	21.0 (±0.5) kg
Glass	High light transmittance coated tempered glass
Frame	Anodised aluminum alloy
Junction Box/Connectors	IP68/PV-HT005-01(HT-SAAE products)
Cable	4mm ² (IEC) length: (+) 1200mm, (-) 1200mm
Fire Rating	Class C
Packaging Configuration	36 pcs/box: 936 pcs/ 40' HQ Container

*The module recycling should be carried out by the professional institutions at the end of module life cycle

*Copyright©2023V1 Specifications are subject to change without further notification *Only available in Australia