

Hi-MO **5m**

LR5-54HPH 405~425M

- Suitable for distributed projects
- Advanced module technology delivers superior module efficiency
 - M10 Gallium-doped Wafer
 - Integrated Segmented Ribbons
 - 9-busbar Half-cut Cell
- Excellent outdoor power generation performance
- High module quality ensures long-term reliability

25 25-year Warranty for
Materials and Processing

25 25-year Warranty for Extra
Linear Power Output

Complete System and Product Certifications

IEC 61215, IEC 61730, UL 61730

ISO9001:2015: ISO Quality Management System

ISO14001: 2015: ISO Environment Management System

ISO45001: 2018: Occupational Health and Safety

IEC62941: Guideline for module design qualification and type approval

LONGI



21.8%
MAX MODULE
EFFICIENCY

0~3%
POWER
TOLERANCE


<2%
FIRST YEAR
POWER DEGRADATION

0.55%
YEAR 2-25
POWER DEGRADATION

HALF-CELL
Lower operating temperature



Additional Value

25-Year Power Warranty

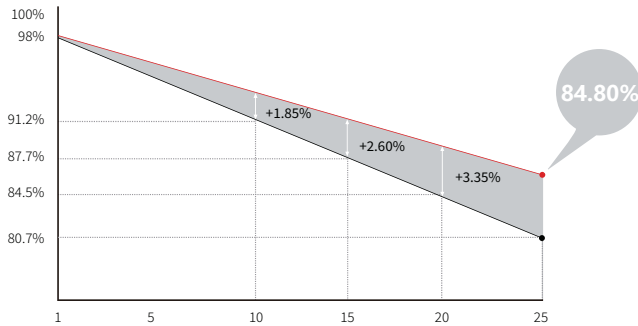

Mechanical Parameters

| | |
|------------------|--|
| Cell Orientation | 108 (6×18) |
| Junction Box | IP68, three diodes |
| Output Cable | 4mm ² , 1200mm |
| Connector | Staubli MC4 EVO2 |
| Glass | Single glass, 3.2mm coated tempered glass |
| Frame | Anodized aluminum alloy frame |
| Weight | 20.8kg |
| Dimension | 1722×1134×30mm |
| Packaging | 36pcs per pallet / 216pcs per 20' GP / 936pcs per 40' HC |

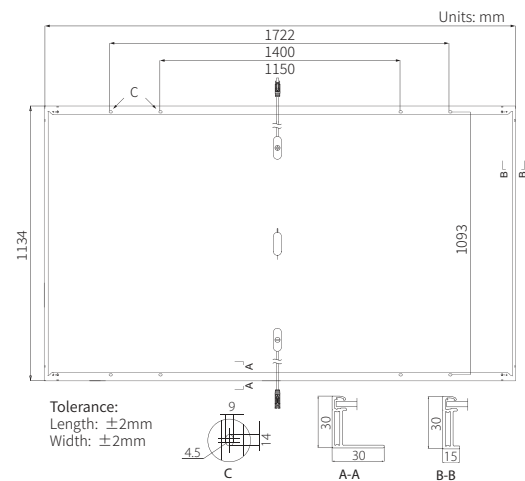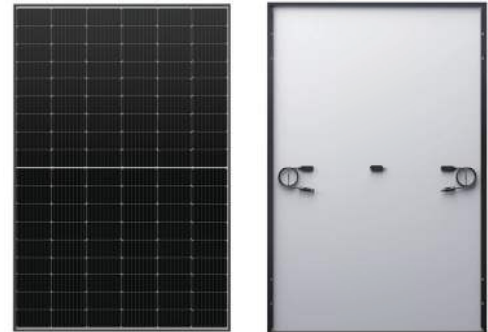

Electrical Characteristics

STC : AM1.5 1000W/m² 25°C NOCT : AM1.5 800W/m² 20°C 1m/s Test uncertainty for Pmax: ±3%

| Module Type | LR5-54HPH-405M | | LR5-54HPH-410M | | LR5-54HPH-415M | | LR5-54HPH-420M | | LR5-54HPH-425M | |
|----------------------------------|----------------|-------|----------------|-------|----------------|-------|----------------|-------|----------------|-------|
| | STC | NOCT | STC | NOCT | STC | NOCT | STC | NOCT | STC | NOCT |
| Testing Condition | STC | NOCT | STC | NOCT | STC | NOCT | STC | NOCT | STC | NOCT |
| Maximum Power (Pmax/W) | 405 | 302.7 | 410 | 306.5 | 415 | 310.2 | 420 | 313.9 | 425 | 317.7 |
| Open Circuit Voltage (Voc/V) | 37.00 | 34.79 | 37.25 | 35.02 | 37.50 | 35.26 | 37.75 | 35.49 | 37.96 | 35.69 |
| Short Circuit Current (Isc/A) | 13.83 | 11.18 | 13.88 | 11.22 | 13.94 | 11.27 | 14.01 | 11.32 | 14.08 | 11.38 |
| Voltage at Maximum Power (Vmp/V) | 31.00 | 28.80 | 31.25 | 29.03 | 31.49 | 29.25 | 31.73 | 29.47 | 31.94 | 29.67 |
| Current at Maximum Power (Imp/A) | 13.07 | 10.52 | 13.12 | 10.56 | 13.18 | 10.60 | 13.24 | 10.65 | 13.31 | 10.71 |
| Module Efficiency(%) | 20.7 | | 21.0 | | 21.3 | | 21.5 | | 21.8 | |

Operating Parameters

| | |
|------------------------------------|-------------------------------|
| Operational Temperature | -40°C ~ +85°C |
| Power Output Tolerance | 0 ~ 3% |
| Voc and Isc Tolerance | ±3% |
| Maximum System Voltage | DC1500V (IEC/UL) |
| Maximum Series Fuse Rating | 25A |
| Nominal Operating Cell Temperature | 45±2°C |
| Protection Class | Class II |
| Fire Rating | UL type 1 or 2 IEC Class C |

Mechanical Loading

| | |
|-----------------------------------|--------------------------------------|
| Front Side Maximum Static Loading | 5400Pa |
| Rear Side Maximum Static Loading | 2400Pa |
| Hailstone Test | 25mm Hailstone at the speed of 23m/s |

Temperature Ratings (STC)

| | |
|---------------------------------|------------|
| Temperature Coefficient of Isc | +0.050%/°C |
| Temperature Coefficient of Voc | -0.265%/°C |
| Temperature Coefficient of Pmax | -0.340%/°C |